

Project:	
Location:	
Item #:	Quantity:
Model #:	

MODEL: IDC-VCO18

PASTRY DISPLAY CASES - Combo Series

General Strengths

- Control systems. Higher precision in managing temperature settings. The ability to adjust temperature ranges to meet end user's requirements.
- 100% Tested. All condenser units are 100% tested in helium chambers in order to detect refrigeration leaks.
- Certified. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- Lighting. Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Considerably increases product visibility.



MODEL	Dimensions (inches) (mm)			Sides	Shelving	Ref.	Refrig. Amount		Capacity (Cu. Ft.)	Cond. Unit.	Case	Crated Weight
	w	D	Н				(Lbs.) (gr.)	(ºF) (ºC)	(L)	H.P.	Amps	(Lbs.) (Kg.)
IDC-VCO18	73-15-16	35	57-1/4	1-3/16+1-3/16	1	1 R404A	1.10	35ºF / 41ºF	14.16	1	12.7	810
IDC-VC018	1875	810	1455	30+30			500	+2ºC/+5ºC	401			367

1.305.777.9599 Office 1.305.777.9598 Fax









Infrico USA Corp. www.infrico.us 1409 N.W. 84th Avenue service@infrico.com Doral, FL 33126

APPROVALS:

AVAILABLE AT:





Project:	
Location:	
Item #:	Quantity:
Model #	

MODEL: IDC-VCO18

PASTRY DISPLAY CASES - Combo Series

STANDARD FEATURES

Exterior

- Laminated steel plate,
- Exhibition area in EPOXI,
- Decoration DM lacqued,
- Hinged front tempered glass,
- Rear sliding doors,
- Double lateral glass sides,
- Dry countertop,
- Night curtain,

> Interior

- Enamelled steel base,
- LED lighting in the front,
- LED lighting in canopy and under each shelf,

> Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high-density polyurethane insulation,
- Low GWP & Zero ODP effect.

Refrigeration

- Digital temperature controller with automatic defrost system,
- Rear electronic thermostat.
- Forced air refrigeration system,
- Stainless Steel Evaporative double trays, first, by hot gas, second by electrical resistance.
- Refrigerant gas R404A,
- Case engineered to operate at 75°F and 55% relative humidity.

Electrical

- Cord and NEMA 5-20P plug,
- Electrical connection is 115V / 1ph / 60 Hz.




ETL Listed to UL471 Standard and Sanitation classified to NSF7.

OPTIONAL FEATURES

- Customizable decoration for the front and sides,
- White color,
- Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

PLAN VIEW

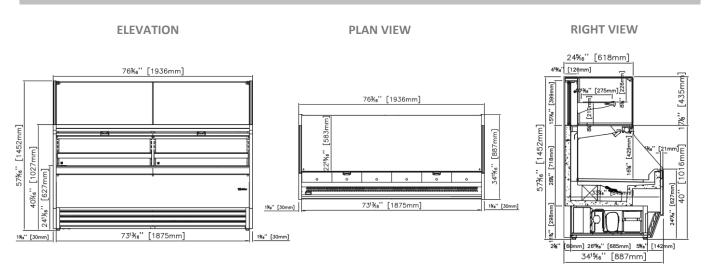











www.infrico.us service@infrico.com APPROVALS:

AVAILABLE AT:



