


Project:	
Location:	
Item #:	Quantity:
Model #:	

MODEL: ICT-VIP1740B1/3SOLIDLID

COUNTER TOP: Refrigerated ingredient displays – Glass top





General Strengths

- 1 Sanitation. The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- Lighting. Interior cabinet includes LED lighting, for brighter lighting and energy efficiency, LED saves 90% more energy compared to traditional fluorescent bulbs. Considerably increases product visibility.
- Control systems. Higher precision in managing temperature settings. The ability to adjust temperature ranges to meet end user's requirements.
- 100% Tested. All condenser units tested 100%, in helium chambers to refrigerant leak detections.
- Certified. Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. EQA audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); ISO 45001:2018 (Prevention and Worker Safety)

MODELS		Dimensions (inches) (mm) W D H		Doors	Ref.	Ref.Weight (Lbs.) (gr.)	Temperature Range (ºF) (ºC)	Cond. Unit (H.P)	Capacity (Cu.Ft.) (L)	Case Amps 115V	Crated Weight (Lbs.) (Kg.)
ICT-VIP1740B1/3SOLIDLID	68-1/4 1733	16-1/4 413	10-1/4 260	-	R600	0,11 50	39ºF/41ºF 4ºC/6ºC	1/8	1.83 52	1.82	146 66

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate División 1409NW 84th Avenue, Doral FL 33126 (305) 777 9599 ext.700 / f (305) 777 9598 Toll Free 855-340-4637

www.infrico.us sales@infrico.com service@infrico.com

🚟 🚟 🔞 🤕 🕕 MAFSI 🗺 🔼

str Infrico

Project:______ Location:______ Item #:_____Quantity:_____ Model #:

MODEL: ICT-VIP1740B1/3SOLIDLID

COUNTER TOP: Refrigerated ingredient displays – Glass top

STANDARD FEATURES

> Exterior

- AISI 304 Stainless Steel,
- Safety glass on the top, closed in the front (facing the customer) and open in the back (facing the operator),
- Sliding doors on the back,
- Levelling feet.

> Interior

- AISI 304 Stainless Steel,
- Sealed interior floors and rounded cabinet corners,
- Stainless steel 6" deep pans, included.

OPTIONAL FEATURES

Electrical connections is:

220 – 230 V / 1 ph / 50Hz (plug type varies).

Insulation

- Polyurethane with high density 40kg/m³, CFS free, zero ODP and low GWP.
- Low GWP & Zero ODP effect.

Refrigeration

- Digital temperature controller,
- Cold wall refrigeration system,
- Refrigeration capacity: 973 Btu/h (14ºF) / 190 W (-10ºC).
- Electrical
 - Cord and NEMA 5-15P plug,
 - Electrical connection is 115V/ 1ph / 60 Hz.
- > ETL Listen to UL471 Standard and Sanitation classified to NSF7.

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



INFRICO-North America Corporate División 1409NW 84th Avenue, Doral FL 33126 (305) 777 9599 ext.700 / f (305) 777 9598 Toll Free 855-340-4637

www.infrico.us sales@infrico.com service@infrico.com



Project:_____ Location:_____

Item #:_____Quantity:_____

Model #:


MODEL: ICT-VIP1740B1/3SOLIDLID


COUNTER TOP: Refrigerated ingredient displays – Glass top

PLAN VIEW


ELEVATION

RIGHT VIEW

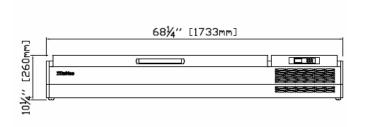



PLAN VIEW

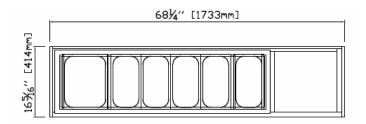

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



INFRICO-North America Corporate División 1409NW 84th Avenue, Doral FL 33126 (305) 777 9599 ext.700 / f (305) 777 9598 Toll Free 855-340-4637

www.infrico.us sales@infrico.com service@infrico.com