



minipack[®]
america

1832 North Glassell Street · Orange, CA 92865, USA
Call: +1 (714) 283-4200 · Fax: +1 (714) 283-4268
info@minipack.us · www.minipack.us

MVS 840 (Front & Back)



Chamber & Seal Bars	
Chamber Width x Length	27.00" x 35.00"
Chamber Height	10.00"
Number of Seal Bars (lid mounted)	2
Position of Seal Bars	Front & Back
Seal Bar Length	2 x 24.50"
Distance between Seal Bars	29.50"
Quick Change Seal Bars	✓
Independent Power to each Seal Bar	✓
Performance	
Pump Type	Busch R5 Oil Rotary
Cycles per Minute*	up to 3
Free Air Displacement @ 50Hz	160 m ³ /h
Free Air Displacement @ 60Hz	190 m ³ /h
Pump Power Rating	8 hp
Power Supply	200-240V / 3ph / 38A
Display & Controls	
Water Resistant Digital Display (IP65)	✓
Selectable Control (Time or %)	✓
Electronic Millibar Sensor	✓
Customizable Programs	9
Operational Features	
Programmable Sealbar Pre-Heat	✓
Programmable Sealing Time	✓
Gentle Air Return	✓
Gas Plus Program (pouch ballooning)	✓
Extra Vacuum (30 sec)	✓
Fast & Hygienic Lid Evacuation	✓
High Volume Density Plates	✓
Service	
Pump Conditioning	✓
Self Diagnostic	✓
Indicating Display	✓
Toolless Valve Replacement	✓
Programmable Service Reminder	✓
1 Year Limited Warranty	✓
2nd Year Conditional Warranty**	VP Program
Housing & Dimensions	
Material	Stainless 304
Lid Type / Lid Spring Alignment	Swing Lid / Horizontal
Width x Length	58.75" x 38.75"
Height (Lid open/closed)	53.00" / 43.00"
Working Height	33.00"
Locking Casters	✓
Shipping Weight	1480lbs
Optional Features	
Seal & Shrink Bag Cutter	✓
Gas Kit - N ₂ /CO ₂ /Ar	✓
Seal Bar Air Assist	✓

*Depends on type of product, film and operator ability.
**Through a certified minipack america dealer.
Specifications may change without notice.



minipack[®]
america

1832 North Glassell Street · Orange, CA 92865, USA
Call: +1 (714) 283-4200 · Fax: +1 (714) 283-4268
info@minipack.us · www.minipack.us

MVS 840 (Left & Right)



Chamber & Seal Bars	
Chamber Width x Length	27.00" x 35.00"
Chamber Height	10.00"
Number of Seal Bars (lid mounted)	2
Position of Seal Bars	Left & Right
Seal Bar Length	2 x 33.00"
Distance between Seal Bars	21.00"
Quick Change Seal Bars	✓
Independent Power to each Seal Bar	✓
Performance	
Pump Type	Busch R5 Oil Rotary
Cycles per Minute*	up to 3
Free Air Displacement @ 50Hz	160 m ³ /h
Free Air Displacement @ 60Hz	190 m ³ /h
Pump Power Rating	8 hp
Power Supply	200-240V / 3ph / 38A
Display & Controls	
Water Resistant Digital Display (IP65)	✓
Selectable Control (Time or %)	✓
Electronic Millibar Sensor	✓
Customizable Programs	9
Operational Features	
Programmable Sealbar Pre-Heat	✓
Programmable Sealing Time	✓
Gentle Air Return	✓
Gas Plus Program (pouch ballooning)	✓
Extra Vacuum (30 sec)	✓
Fast & Hygienic Lid Evacuation	✓
High Volume Density Plates	✓
Service	
Pump Conditioning	✓
Self Diagnostic	✓
Indicating Display	✓
Toolless Valve Replacement	✓
Programmable Service Reminder	✓
1 Year Limited Warranty	✓
2nd Year Conditional Warranty**	VP Program
Housing & Dimensions	
Material	Stainless 304
Lid Type / Lid Spring Alignment	Swing Lid / Horizontal
Width x Length	58.75" x 38.75"
Height (Lid open/closed)	53.00" / 43.00"
Working Height	33.00"
Locking Casters	✓
Shipping Weight	1480lbs
Optional Features	
Seal & Shrink Bag Cutter	✓
Gas Kit - N ₂ /CO ₂ /Ar	✓
Seal Bar Air Assist	✓


*Depends on type of product, film and operator ability.
**Through a certified minipack america dealer.
Specifications may change without notice.

MVS 840

Pump: Busch R5 Oil Rotary / 8hp / 160 m³/h
Power: 200-240V / 3ph / 38A



Front & Back:

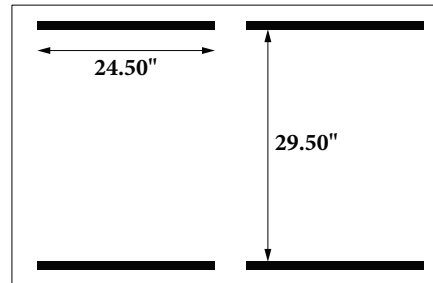

Left & Right:

