

## Aurora Mega Top Refrigerated Prep Tables, 1 Door, Stainless Steel

ITEM:	59049	59129	59050	59051	59130
MODEL:	PT-CN-0711E-HC	PT-CN-0920E-M-HC	PT-CN-1537E-HC	PT-CN-1537E-HC	PT-CN-1787E-M-HC



28" wide  
59049



36" wide  
59129

47" wide  
59050

60" wide  
59051



70" wide  
59130

### Aurora Mega Top Refrigerated Prep Table helps enhance your food business setups and preparation quickly and easily.

This refrigerated prep table line boasts a spacious working area, allowing for extra ingredient storage. Plus, it's environmentally friendly and energy-efficient thanks to the Hydro-Carbon R290 refrigerant it uses.

High-quality stainless steel construction provides durability and longevity and guarantees maximum hygiene and food-grade standards.

#### FEATURES:

- **Spacious** - This refrigerated prep table boasts a spacious working area, allowing for extra ingredient storage.
- **Durable Construction** - High-quality stainless steel construction provides durability and longevity, and guarantees maximum hygiene and food-grade standards.
- **Mobility** - The table is equipped with heavy-duty casters for effortless movement and setup, while ensuring that your surface remains unscathed.
- **Energy Efficiency** - The system is built using Cyclopentane, which helps to maintain the temperature within the food storage while reducing energy consumption
- **Convenience** - Thick commercial-grade cut board mounted to the table is convenient for cutting and dicing the food during preparation, protecting your table from scratches and knife marks.
- **Eco-Friendly** - The equipment uses Hydro-Carbon R290 refrigerant, which is both environmentally friendly and energy efficient. This results in an overall reduction of energy costs of up to 28%

Telephone: 1-800-465-0234


Fax: (905) 607-0234

Email: sales@omcan.com

Website: www.omcan.com



Authorized Dealer

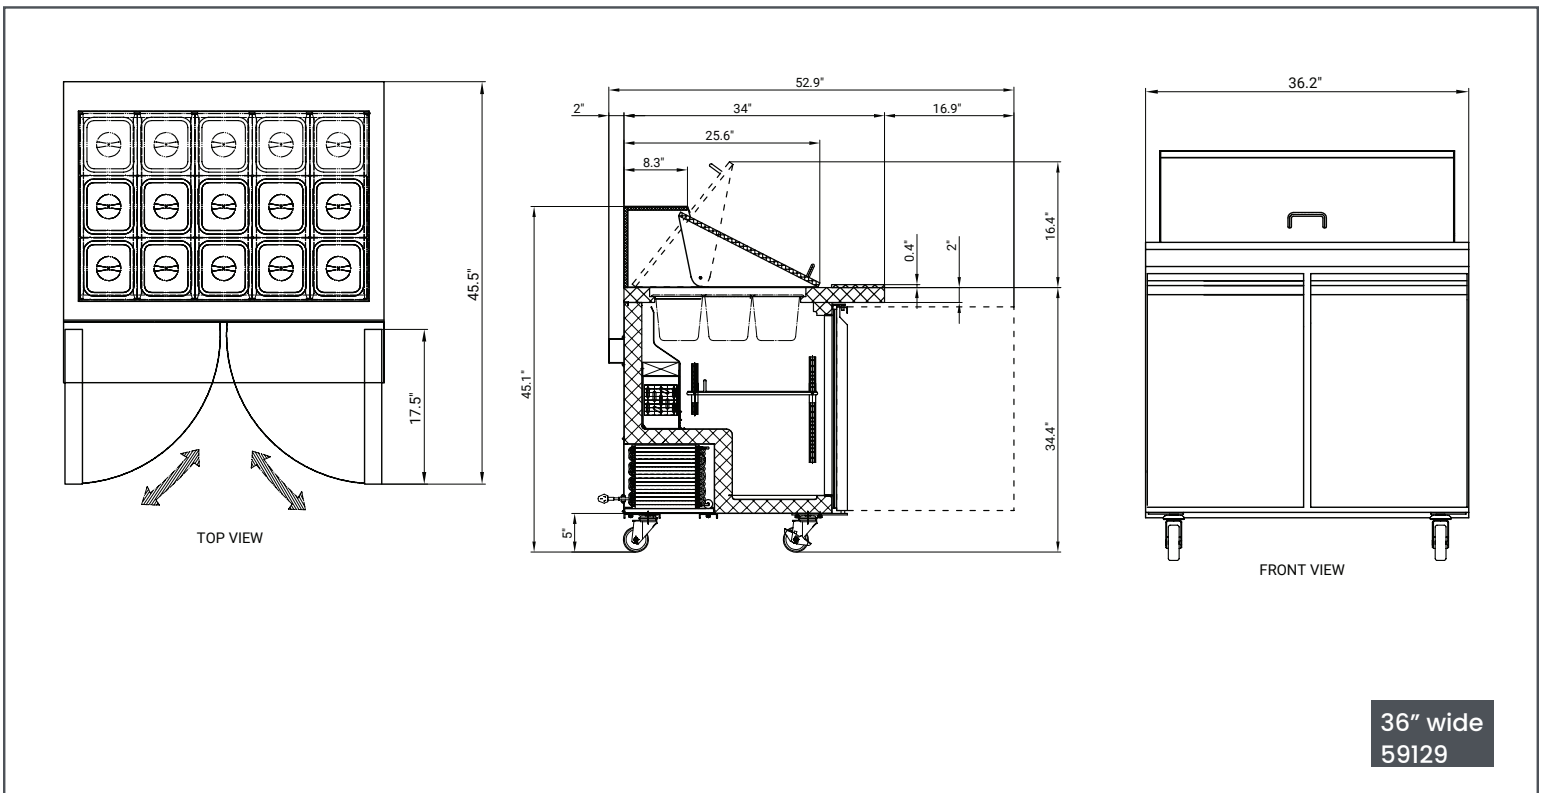
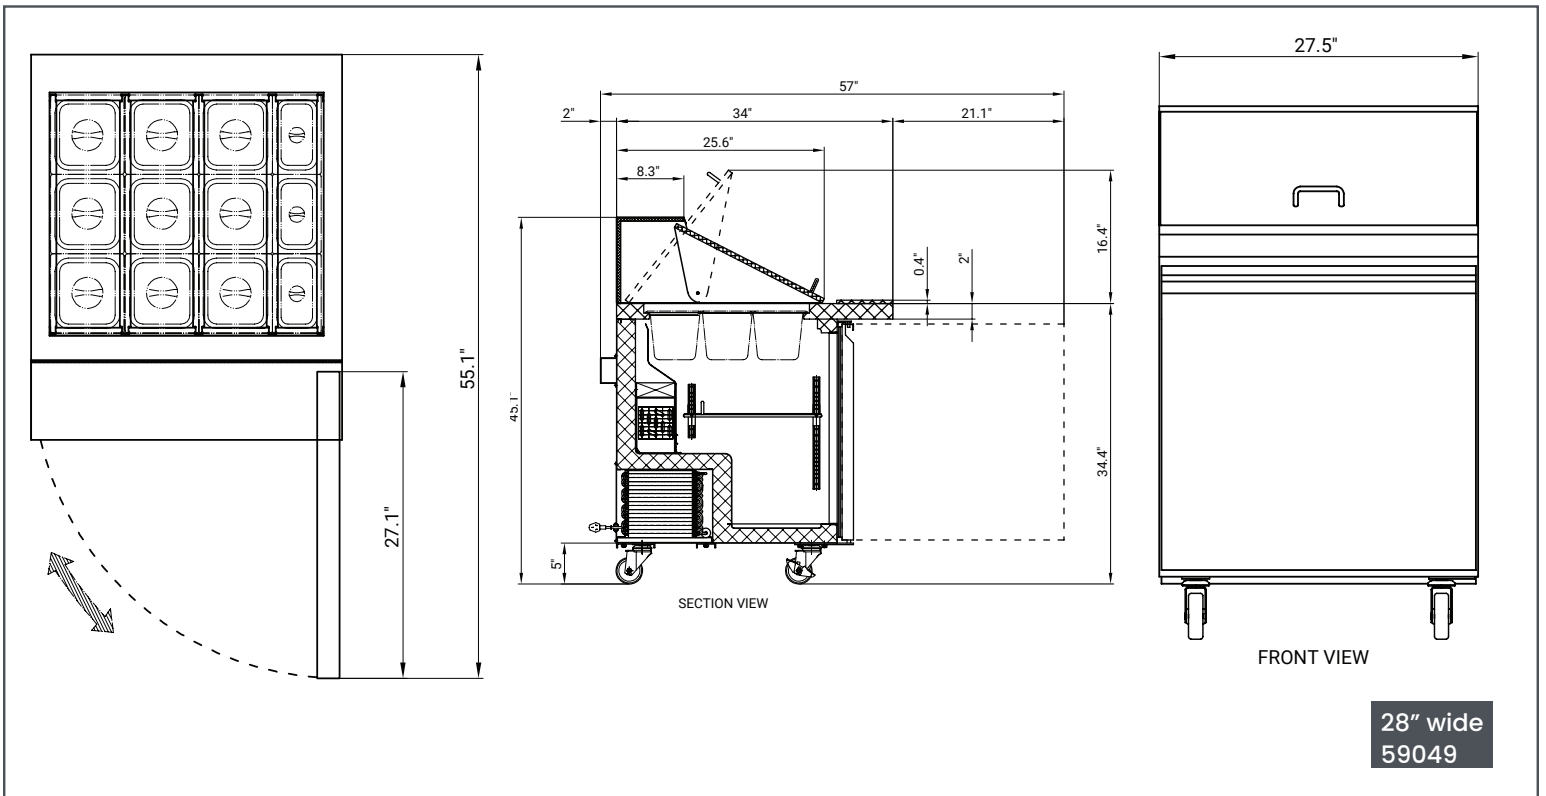

**WARRANTY**  
 2 YEARS PARTS AND LABOUR  
 5 YEARS ON COMPRESSOR


**TECHNICAL SPECIFICATION**

Features	28" wide	36" wide	47" wide	60" wide	70" wide
Item	59049	59129	59050	59051	59130
Model	PT-CN-0711E-HC	PT-CN-0920E-M-HC	PT-CN-1537E-HC	PT-CN-1537E-HC	PT-CN-1787E-M-HC
Capacity	7.1 cu. ft. (201 L)	9.1 cu. ft. (258 L)	12.6 cu.ft. (357 L)	16.6 cu.ft. (469 L)	19.5 cu.ft (553 L)
Number of Doors	1 Swing Door - Solid Door	2 Swing Doors - Solid Door	2 Swing Doors - Solid Door	2 Swing Doors - Solid Door	3 Swing Doors - Solid Door
Self-Closing Door	Yes				
Number of Pans	9 x 1/6 GN pans 3 x 1/9 GN pans	15 x 1/6 GN pans	18 x 1/6 GN pans	24 x 1/6 GN pans	30 x 1/6 GN pans
Number of Shelves	1	2	2	2	3
Shelf Material	Plastic Coated				
Shelf Capacity	88 lb. (40 kg.)				
Number of Casters	YES (4)				
Power	372W	420W	408W	504W	670W
Amps	3.6 A	1.2 A	4.1 A	5 A	6.7 A
Electrical	110V-120V / 60Hz / 1Ph				
Temperature Controller	Digital				
Temperature Range	0.5°C - 4.4°C (33°F - 40°F)				
Refrigerant	R290				
Insulation Material	Cyclopentane				
Cooling System	Ventilated				
Defrosting	Automatic				
Cutting Board Thickness	10 mm				
Interior Dimensions (WDH)	24.2 x 19.8 x 23.5" (615 x 504 x 597 mm)	33" x 19.8" x 23.5" (837 x 504 x 597 mm)	43" x 19.8" x 23.5" (1091 x 504 x 597mm)	56.5" x 19.8" x 23.5" (1434 x 504 x 597mm)	66.6" x 19.8" x 23.5" (1691 x 504 x 597 mm)
Net Weight	198.4 lb. (90 kg.)	242.5 lb. (110 kg.)	275.6 lb. (125 kg.)	341.7 lb. (155 kg.)	374.8 lb. (170 kg.)
Net Dimensions (WDH)	27.5" x 29.5" x 41.5" (698 x 750 x 1055 mm)	36.2" x 29.5" x 41.5" (920 x 750 x 1055 mm)	46.8" x 29.5" x 42.3" (1188 x 750 x 1075mm)	60.2" x 29.5" x 42.3" (1529 x 750 x 1075mm)	70.4" x 29.5" x 42.3" (1787 x 750 x 1075 mm)
Gross Weight	251 lb. (114 kg.)	309 lb. (140 kg.)	370 lb. (168 kg.)	427 lb. (194 kg.)	578 lb. (262 kg.)
Gross Dimensions (WDH)	33" x 35" x 46" (830 x 880 x 1160 mm)	41" x 35" x 46" (1052 x 880 x 1160 mm)	52" x 35" x 46" (1320 x 880 x 1160mm)	65" x 35" x 46" (1660 x 880 x 1160 mm)	76" x 35" x 46" (1920 x 880 x 1160mm)
Plug Type	NEMA 5-15P				

**\* This equipment is intended for indoor environment using where ambient temperature do not exceed 24°C(75°F) & 55% relative humidity**

## TECHNICAL DRAWING



**FRONT VIEW**

**TOP VIEW**

46.8"

**FRONT VIEW**

**47" wide  
59050**

**FRONT VIEW**

**TOP VIEW**

60.2"

**FRONT VIEW**

**60" wide  
59051**

**FRONT VIEW**

**TOP VIEW**

70.4"

**FRONT VIEW**

**70" wide  
59130**