

Aurora Display Refrigerations, 1 Glass Door with Lightbox

ITEM:
MODEL:

59035
RE-CN-0014E-H

59036
RE-CN-0023E-HC



26" wide
59035 | RE-CN-0014E-H



29" wide
59036 | RE-CN-0023E-HC

Attractively display food merchandise and increase impulse sales with Aurora single glass door display refrigerator with lightbox.


Complemented by a built-in lightbox that enhances product visibility and draws customer attention. Ideal for supermarkets, cafes, and delis, the Aurora refrigerator combines ample storage with stylish design, enhancing both the aesthetic appeal and functionality of your business.

FEATURES:

- Incredibly Spacious - Adjustable Shelves**
This unit is extremely spacious with a large cabinet with multiple adjustable shelves, thus maximizing your commercial kitchen space.
- Powerful, environmentally safe refrigeration system**
Uses R290 refrigerant to keep your ingredients and fully prepared foods at safe frozen temperatures. The compressor is bottom mounted for energy efficiency and also raises the bottom shelf, so all your frozen ingredients are within reach and you don't have to bend as much during loading and unloading.
- Digital Temperature Control**
Easily adjust the freezer cabinet's temperature with the digital temperature controller. The clear LCD readout also helps keep track of the unit's temperature.
- Autodefrost System**
This unit has an automatic defrost feature which eliminates the need to spend invaluable time cleaning out the ice.




WARRANTY
2 YEARS PARTS AND LABOUR
5 YEARS ON COMPRESSOR




TECHNICAL SPECIFICATION		
Features	26" wide with 13.5 cu.ft. capacity and lightbox	29" wide with 22.6 cu.ft. capacity and lightbox
Item	59035	59026
Model	RE-CN-0014E-H	RE-CN-0041E-HC
Color	White	Black
Capacity	13.5 cu.ft. (382 L)	22.6 cu.ft. (640L)
Number of Doors	1 Swing Door - Glass Door	
Self-Closing Door	Yes	
Material	Stainless steel interior and exterior, aluminum back	
Number of Shelves	4	
Shelf Capacity (kg/pc)	88 lb. (40 kg.)	
Shelf Material	Plastic Coated	
Number of Casters	No	Yes (4)
Power	288W	384 W
Amps	3 A	4 A
Electrical	110-120V / 60Hz / 1Ph	
Temperature Controller	Digital	
Temperature Range	0.5°C - 4.4°C (33°F - 40°F)	
Refrigerant	R290	
Insulation Material	Cyclopentane	
Cooling System	Ventilated	
Defrosting	Automatic	
Interior Dimensions (WDH)	22.8" x 19.5" x 55.5" (580 x 495 x 1410 mm)	25.2" x 28.3" x 62.5" (640 x 720 x 1588 mm)
Net Weight	264.6 lb. (120 kg.)	319.7 lb. (145 kg.)
Net Dimensions (WDH)	25.6" x 22.8" x 79.3" (650 x 580 x 2015 mm)	28.3" x 31.9" x 79.3" (720 x 810 x 2015 mm)
Gross Weight	298 lb. (135 kg.)	353 lb. (160 kg.)
Gross Dimensions (WDH)	26" x 23" x 79" (650 x 580 x 2015 mm)	30" x 36" x 85" (762 x 914 x 2519 mm)
Plug Type	NEMA 5-15P	

** This equipment is intended for indoor environment using where ambient temperature do not exceed 24°C(75°F) & 55% relative humidity*

TECHNICAL DRAWING

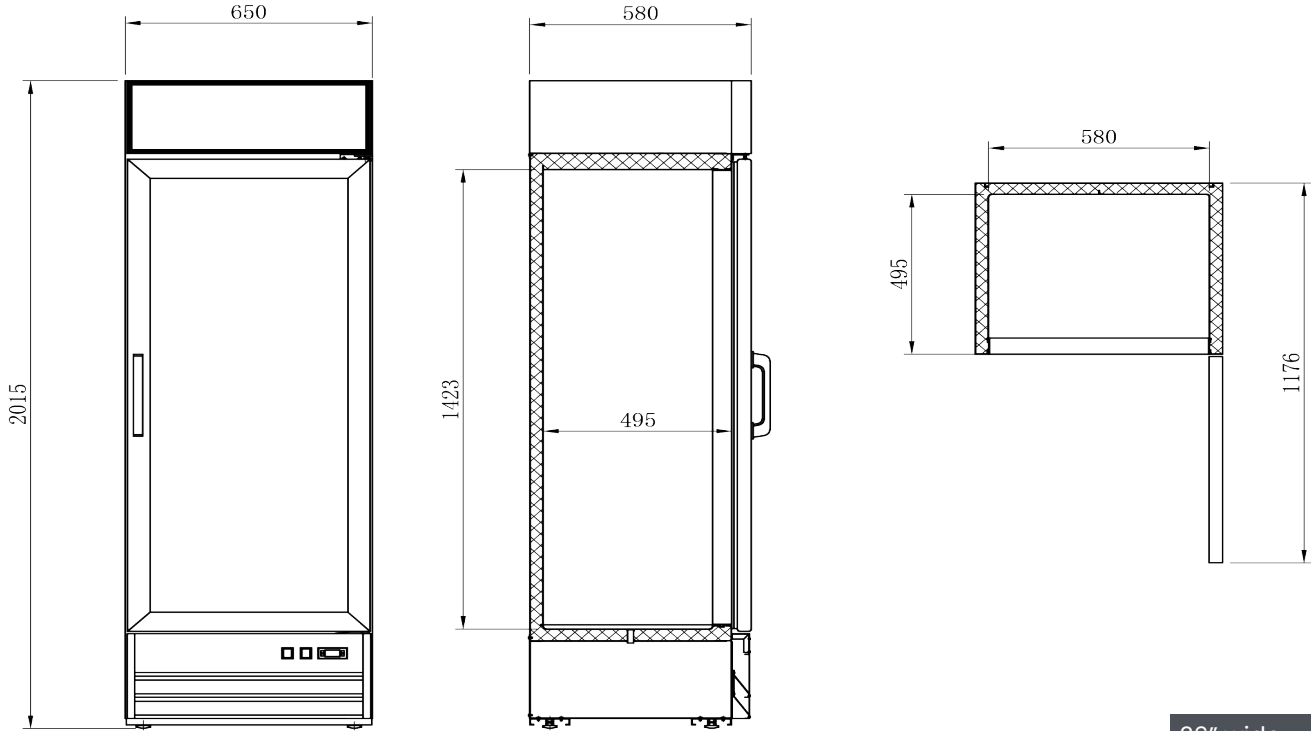

26" wide
59035 | RE-CN-0014E-H

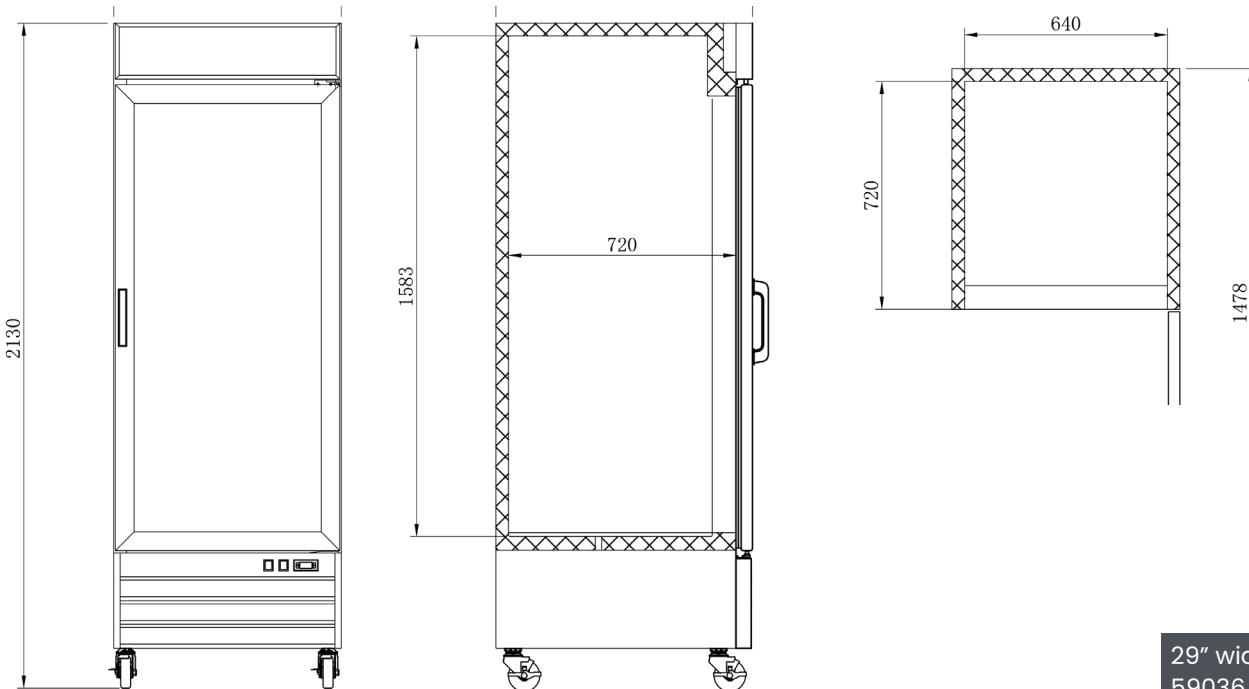

29" wide
59036 | RE-CN-0023E-HC