

# COFFEE BREWING SYSTEMS

## CBS-1260 Plus Brewers 3.0-3.5 GALLON BREWING SYSTEM

Shown with D012 12.0L / 3.0G LUXUS® Thermal Dispenser



### PLUG AND PLAY OPERATION

Batch buttons are pre-programmed at the factory. If desired the USB port can be used to upload and download recipes.



### CASCADING SPRAY DOME

Patented design provides even saturation of the coffee bed for maximum extraction. Lime resistant design makes for less service calls.

## DISPENSERS

### CBS-1260 Plus Brewers

#### DISPENSERS

##### D012

12.0 Liter / 3.0 Gallon  
LUXUS® Thermal  
Dispenser  
TPD-30



All dispensers **SOLD SEPARATELY.**



#### BREW BASKET DESIGN

Advanced brew basket design provides a deeper bed depth and superior thermal insulation for better extraction.



#### CONTEMPORARY DESIGN

Traditional FETCO core with modern design enhancements fits well in any front-of-house or back of the house application.



#### ECO MODE

Reduces tank temperature during periods of non-operation to cut down on electricity usage.

# ACCESSORIES

## CBS-1260 Plus Brewers

### BREW BASKETS AND PAPER FILTERS

Item Number	Brew Basket	Coffee Capacity	Filter Size	Filter SKU	Filter/Case
All configurations	Stainless Steel	Up to 32oz / 907g	20" x 8"	F004	500/cs

**B00828004**

21" x 7"  
Stainless Steel  
Brew Basket



**B00828005**

21" x 7"  
Stainless Steel  
Brew Basket  
with Clips

**F004**

20" x 8"  
Paper Filters



Contact Customer Service or your Sales Person for more options.

### WATER FILTRATION SYSTEM

Filtration System	Item Number	Item Description	Rated Capacity	Working Pressure	Weight
Everpure®	A039	In-Line System	113,563 liters	10-125 psi [0.7-8.6 bar], non-shock	6.0 lbs / 2.7 kg
Everpure®	A075	Replacement Cartridge	113,563 liters	10-125 psi [0.7-8.6 bar], non-shock	6.0 lbs / 2.7 kg
BWT Bestmax	A138	In-Line System	3,002 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A139	Replacement Cartridge	3,002 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A140	In-Line System	4,562 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT Bestmax	A141	Replacement Cartridge	4,562 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg

**EVERPURE®**

In-Line Water  
Filtration System



**SET INCLUDES:** 1ea. commercial quality corrosion resistant filter head 1ea. taste and odor filter cartridge (FETCO® #A075) / 1ea. 3/8" x 4' connection hose / 1 set — mounting bracket and hardware.

- Recommended for large-sized operations
- Taste and odor filter for extremely turbid (cloudy) water
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head includes built-in shutoff valve

**BWT BESTMAX**

In-Line Water  
Filtration System



**SET INCLUDES:** 1ea. filter cartridge / 1ea. universal filter head / 1ea. wall mounting bracket Braided hose supplies 3/8" and 3/4" compression, in 24" or 48" lengths

- Recommended for small- to medium-sized operations
- Carbonate hardness removal prevents scale deposits and retains minerals
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head includes built-in shutoff valve
- Four bypass settings allows for different water qualities and product preferences

# TECHNICAL SPECIFICATIONS

## NORTH AMERICA

### CBS-1261 Plus Brewer

#### ELECTRICAL

Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1261US-UB230-MM110 DUAL PHASE	21x7" Metal	208-240 208-240	2 x 3.0 kW 3 x 3.0 kW	1 3	3+G 3+G	4.5-6.0 6.8-9.0	No Cord No Cord	22.2-25.5 19.3-22.2	15.9 / 60.4 23.9 / 90.6	NSF cULus

#### WATER

Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	8.63 / 32.67

### CBS-1262 Plus Brewer

#### ELECTRICAL

Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1262US-3B330-MM110	21x7" Metal	208-240	3 x 3.0 kW	3	3+G	6.8-9.0	No Cord	19.3-22.2	23.9 / 90.6	NSF cULus
E1262US-3B340-MM110	21x7" Metal	208-240	3 x 4.0 kW	3	3+G	9.0-12.0	No Cord	25.5-29.4	31.9 / 120.8	NSF cULus
E1262US-3B630-MM110	21x7" Metal	208-240	6 x 3.0 kW	3	3+G	13.5-18.0	No Cord	38.0-43.8	47.8 / 181.3	NSF cULus
E1262US-3B640-MM110	21x7" Metal	208	6 x 4.0 kW	3	3+G	18.0	No Cord	50.5	47.8 / 181.3	NSF cULus

#### WATER

Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	3.00 / 11.36	15.86 / 60.04

1 This version is made to order and it might require longer production lead time. Please ask your local sales representative for more information.

# TECHNICAL SPECIFICATIONS

## INTERNATIONAL

### CBS-1261 Plus Brewer

#### ELECTRICAL

Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1261IN-3B330-MM110	21x7" Metal	220/380-240/415	3 x 3.0 kW	3	3L/N/G	7.6-9.0	No Cord	12.0-12.9	23.9 / 90.6	NSF cULus
E1261IN-3B340-MM110	21x7" Metal	220/380-240/415	3 x 4.0 kW	3	3L/N/G	10.1-12.0	No Cord	15.8-17.2	30.0 / 113.7	NSF cULus
E1261IN-3B350-MM110 <sup>1</sup>	21x7" Metal	220/380-240/415	3 x 5.0 kW	3	3L/N/G	12.6-15.0	No Cord	19.6-21.3	30.0 / 113.7	NSF cULus
E1261NM-3B350-MM110	21x7" Metal	208-240	3 x 5.0 kW	3	3+G	11.3-15.0	No Cord	31.8-36.6	30.0 / 113.7	NSF NOM
E1261CE-3B330-MM110	21x7" Metal	230/400	3 x 3.0 kW	3	3L/N/PE	8.3	No Cord	12.5	22.1 / 83.6	NSF CE
E1261CE-3B340-MM110	21x7" Metal	230/400	3 x 4.0 kW	3	3L/N/PE	11.0	No Cord	16.5	29.2 / 110.8	NSF CE

#### WATER

Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	1.50 / 5.68	8.63 / 32.67

### CBS-1262 Plus Brewer

#### ELECTRICAL

Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E1262IN-3B350-MM110 <sup>1</sup>	21x7" Metal	220/380-240/415	3 x 5.0 kW	3	3L/N/G	12.6-15.0	No Cord	19.6-21.3	39.9 / 151.1	NSF cULus
E1262IN-3B630-MM110	21x7" Metal	220/380-240/415	6 x 3.0 kW	3	3L/N/G	15.1-18.0	No Cord	23.4-25.5	47.8 / 181.3	NSF cULus
E1262NM-3B630-MM110	21x7" Metal	208-240	6 x 3.0 kW	3	3+G	13.5-18.0	No Cord	38.0-43.8	47.8 / 181.3	NSF NOM
E1262CE-3B340-MM110	21x7" Metal	230/400	3 x 4.0 kW	3	3L/N/PE	11.0	No Cord	16.5	29.2 / 110.8	NSF CE
E1262CE-3B350-MM110	21x7" Metal	230/400	3 x 5.0 kW	3	3L/N/PE	13.8	No Cord	20.5	36.7 / 139.0	NSF CE

#### WATER

Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Male Flare	20-75 / 1.37-5.17	3.00 / 11.36	15.86 / 60.04

<sup>1</sup> This version is made to order and it might require longer production lead time. Please ask your local sales representative for more information.


# DIMENSIONS

## CBS-1261 Plus Brewer

DIMENSIONS							WEIGHT		
	Height (A)	Width (B)	Depth (D)	Depth (E)	Brew Basket Clearance (F)	Faucet Clearance (G)		Empty [lbs] / [kg]	Filled [lbs] / [kg]
<b>Product Dimensions</b>	41.38" 105.11 cm	17.88" 45.42 cm	27.50" 69.85 cm	22.25" 56.52 cm	23.88" 60.66 cm	12.13" 30.80 cm	<b>Product Weight</b>	88 lbs 39.9 kg	160 lbs 72.6 kg
<b>Shipping Dimensions</b>	39.0" 99.06 cm	23.0" 58.42 cm	28.0" 71.72 cm	N/A	N/A	N/A	<b>Shipping Weight</b>	97 lbs 44.0 kg	N/A

## CBS-1262 Plus Brewer

DIMENSIONS							WEIGHT		
	Height (A)	Width (C)	Depth (D)	Depth (E)	Brew Basket Clearance (F)	Faucet Clearance (G)		Empty [lbs] / [kg]	Filled [lbs] / [kg]
<b>Product Dimensions</b>	41.38" 105.11 cm	32.0" 81.28 cm	27.50" 69.85 cm	22.25" 56.52 cm	23.88" 60.66 cm	12.13" 30.80 cm	<b>Product Weight</b>	130 lbs 59.0 kg	266 lbs 120.7 kg
<b>Shipping Dimensions</b>	39.0" 99.06 cm	37.0" 93.98 cm	29.0" 73.66 cm	N/A	N/A	N/A	<b>Shipping Weight</b>	140 lbs 63.5 kg	N/A

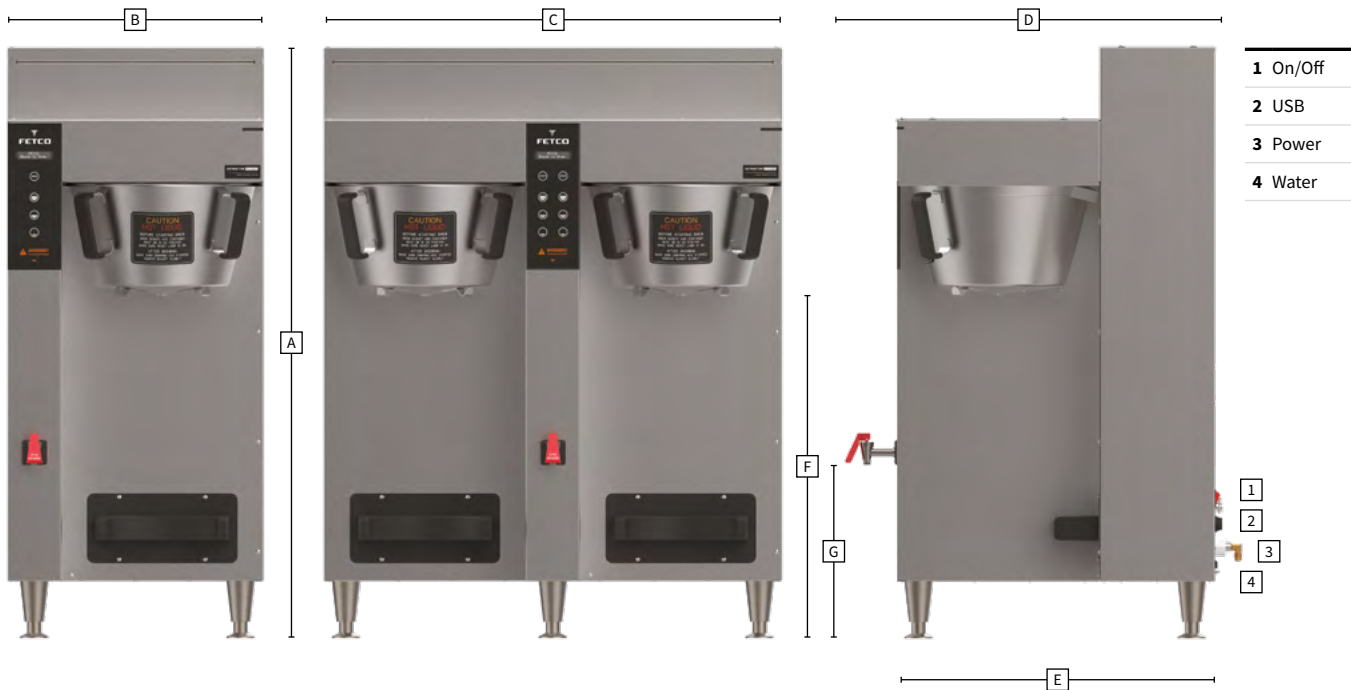

FAX  
+1.847.719.3001