

# HIGH VOLUME COFFEE BREWING SYSTEMS

## MOBILE CART Series

### CBS-72AC (FOR MOBILE CARTS)

Twin 6.0 Gallon Station



Shown with 6.0 Gallon Mobile LUXUS® Thermal Dispenser (LBD-6C)  
and Serving Station for LBD-6 with Drip Tray

FETCO® is the category expert and the ONLY manufacturer of ultra high-volume (7-24 Gallon) portable coffee brewing systems for very large scale operations. Due to the high capacity output and reliable performance the CBS-7000 Series is the preferred choice for specification in hotels, stadiums, convention centers and other large venues.



#### Set it and forget it.

Once your recipe parameters are programmed in, this brewer delivers consistent and repeatable results.



#### Steam Control.

Efficient, steam containing brew compartments virtually eliminate the need for external ventilation, making this system extremely adaptable to any Foodservice environment.



#### Expand Your Service.

Brew directly into a High-Capacity LBD Series Thermal Dispenser (sold separately) and transport for high volume coffee or refill service anywhere throughout your venue.

**FETCO®**  
TRUSTED | RELIABLE | QUALITY

## Water Specification

|   |  |   |
|---|--|---|
| <b>Water Inlet</b><br>¾" male flare fitting | <b>Minimum Flow Rate</b><br>3 gpm [11.4 lpm] | <b>Water Pressure</b><br>20-75 psig [138-517 kPa] |
|---|--|---|


## Electrical Configuration

| Configuration Code     | Heater Configuration | Voltage                | Phase | Wires | KW        | Electrical Connection | Max Amp Draw | Gallon [Liter] /Hour                   |
|------------------------|----------------------|------------------------|-------|-------|-----------|-----------------------|--------------|--|
| <b>US &amp; CANADA</b> |                      |                        |       |       |           |                       |              |  |
| C72018 <sup>(1)</sup>  | 2 x (3x5.0) kW       | 120/208-240            | 3     | 4+G   | 11.5-15.1 | Terminal Block        | 31.9-36.8    | 24.0-36.0 [90.8-136.3] <sup>(4)</sup>  |
| C72028 <sup>(2)</sup>  | 2 x (3x5.0) kW       | 120/208-240            | 3     | 4+G   | 23.0-30.2 | Terminal Block        | 63.8-73.6    | 36.0-42.0 [136.3-159.0] <sup>(4)</sup> |
| C72038 <sup>(1)</sup>  | 2 x (3x10.0) kW      | 120/208-240            | 3     | 4+G   | 22.8-30.1 | Terminal Block        | 63.2-72.9    | 54.0-60.0 [204.4-227.1] <sup>(4)</sup> |
| C72048 <sup>(1)</sup>  | 2 x (3x10.0) kW      | 440-480 <sup>(3)</sup> | 3     | 3+G   | 20.8-30.0 | Terminal Block        | 30.1-36.1    | 60.0 [227.1] <sup>(4)</sup>            |
| C72058 <sup>(2)</sup>  | 2 x (3x10.0) kW      | 440-480 <sup>(3)</sup> | 3     | 3+G   | 41.7-60.0 | Terminal Block        | 60.1-72.2    | 60.0 [227.1] <sup>(4)</sup>            |
| <b>INTERNATIONAL</b>   |                      |                        |       |       |           |                       |              |  |
| C72108                 | 2 x (3 x 5.0) kW     | 220-240/380-415        | 3     | 4+G   | 12.9-15.1 | Terminal Block        | 19.5-21.3    | 18.2 [69.0] <sup>(1)</sup>             |
| C72118                 | 2 x (3 x 10.0) kW    | 220-240/380-415        | 3     | 4+G   | 25.5-30.1 | Terminal Block        | 38.6-42.1    | 24.3-30.4 [92.0-115.0] <sup>(1)</sup>  |

- (1) With power management.
- (2) Without power management.
- (3) Plus power cord for control, 120 VAC.
- (4) Based on standard factory settings: 7.0 minute brew time; 0% prewet; 200°F water.

## Measurements

|                                     |                               |                                   |   |  |  |   |
|-------------------------------------|-------------------------------|-----------------------------------|---|--|--|---|
| <b>Height</b><br>78 1/8" [199.5 cm] | <b>Width</b><br>36" [91.4 cm] | <b>Depth</b><br>32 1/4" [83.2 cm] | <b>Empty Weight</b><br>410 lbs [186.0 kg] | <b>Filled Weight</b><br>721 lbs [327.0 kg] | <b>Shipping Weight</b><br>410 lbs [186.0 kg] | <b>Shipping Dimensions:</b><br>55" x 48" x 42" [139.7 x 121.9 x 106.7 cm] |
|-------------------------------------|-------------------------------|-----------------------------------|---|--|--|---|

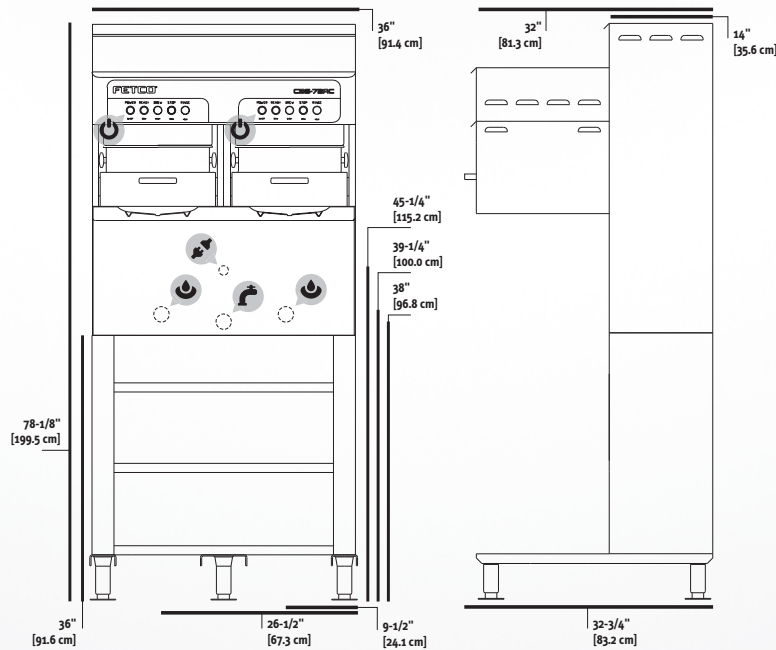

- Electrical Connector
- Tank Drain
- Water Inlet
- On / Off Switch



## Compatible Dispensers

|  |      |
|--|------|
| 6.0 Gallon Mobile LUXUS® Thermal Dispenser (LBD-6C)  | D020 |
| 18.0 Gallon Mobile LUXUS® Thermal Dispenser (LBD-18) | D021 |
| 24.0 Gallon Mobile LUXUS® Thermal Dispenser (LBD-24) | D022 |

## Customize Your Brewer

|   |      |
|---|------|
| Gravity Jug Fill Hose for LBD-6C & LBD-18 | A037 |
| Identifier Plates, Acrylic                | A069 |

## Cups per Hour\*

|                 |                  |                  |                  |
|-----------------|------------------|------------------|------------------|
| 8oz. <b>960</b> | 12oz. <b>640</b> | 16oz. <b>480</b> | 20oz. <b>384</b> |
|-----------------|------------------|------------------|------------------|

## Paper Coffee Filters

|                     |      |
|---------------------|------|
| 23" x 9" (500/Case) | F006 |
|---------------------|------|

\* Approximate based on maximum power setting.

## Information

fetco.com

847.719.3000  
1.800.338.2699 USA  
847.719.3001

Food Equipment Technologies Co.  
600 Rose Road  
Lake Zurich, IL 60047  
USA