

# ALUMINUM ENCLOSED TRANSPORT CABINETS

Non-Insulated Utility Transport for 18" x 26" Trays

## ALUMINUM NON-INSULATED AMBIENT "ETC-1826-AL" SERIES

All purpose, non-insulated, light-weight cabinet for storage and transport



ETC-1826-15-40-AL

### NON-INSULATED

### ALUMINUM

- 1 Aluminum utility carts are economical, light weight, and heavy duty with an all-welded construction. Perfect for food delivery and storage
- 2 Fixed rack accommodates 18" x 26", 14" x 18", and 13" x 18" trays on a fixed one-piece aluminum rack spaced on 1½" centers for maximum capacity
- 3 Heavy-duty all-swivel polyurethane casters mounted to an all welded base frame are long lasting and used for easy maneuverability, even when fully loaded
- 4 Door is equipped with a gravity door latch and has a 270° door swing, saving space when loading and unloading
- 5 Convenient menu card holding clip is bolted to the door at eye level
- 6 Fully welded seamless design provides sanitary, smooth surface that is easy to clean

*\*Two year limited warranty*



Fixed Tray Slides



Heavy-duty Casters



Gravity Door Latch



Menu Card Holder




FOR MODEL-SPECIFIC CERTIFICATIONS SEE [FWE.COM/CERTIFICATIONS](http://FWE.COM/CERTIFICATIONS)

**NON-HEATED**

# SPECIFICATIONS

## ALUMINUM ENCLOSED TRANSPORT CABINETS

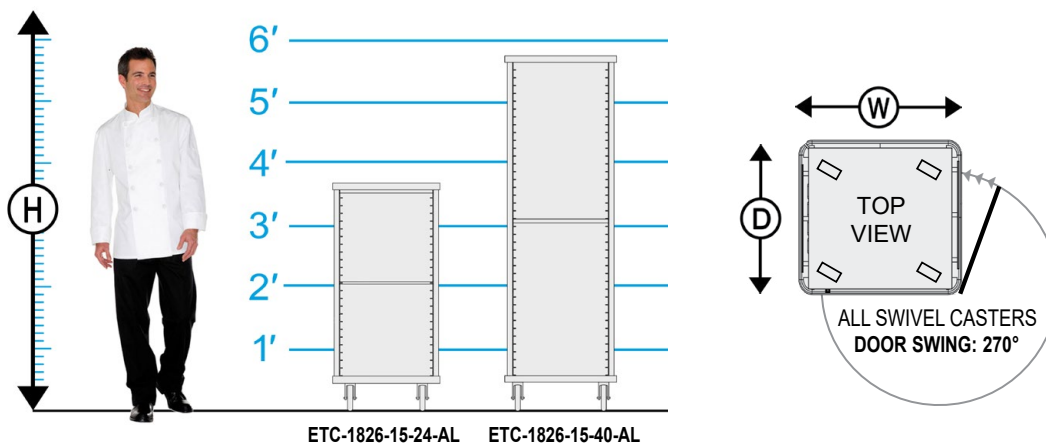

ETC-1826-15-24-AL ETC-1826-15-40-AL

MODEL NUMBER	CAPACITIES OF TRAYS/PANS: 1.5" Spacings are Standard		OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)			CLASS 250		
	[A] STANDARD FIXED RACK: @ 1.5" Spacings		HIGH "H"	DEEP "D"	WIDE "W"	NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)
	18 x 26 14 x 18	13 x 18						
ETC-1826-15-24-AL	24	48	44.25" (1124)	27.75" (705)	21" (534)	1	5"	130 (59)
ETC-1826-15-40-AL	40	80	68" (1727)	27.75" (705)	21" (534)	1	5"	145 (66)

[A] Fixed slides accommodate: (1) 18" x 26", (1) 14" x 18", or (2) 13" x 18" trays/pans.

**CONSTRUCTION.** Heavy duty extruded type 6063 aluminum alloy. All uprights and runners are fully welded. Tongue and groove sidewall panels are continuously welded for maximum strength. Top and base are formed with four (4) lips down and welded.

**DOOR AND LATCH.** Door shall be constructed of .125" thick aluminum panel and shall have three (3) double knuckle stainless steel hinges mounted by bolts. Hinges provide a 270° door swing. Door shall be held closed with a gravity latch. Menu card clip to be mounted to door.

**TRAY GUIDES.** Tray guides are .625" deep x .090 thick at 1.5" spacings, welded to the uprights.

**CASTERS.** 5 x 1.5 inch heavy-duty, easy rolling, polyurethane tire casters, full swivel without brakes.

**INSTALLATION.** Unit should not be installed in an area where adverse environmental conditions are present.

### OPTIONAL ACCESSORIES

#### CASTERS

- Larger casters
- Casters with brakes

#### EXTRAS

- Full perimeter bumper
- Corner bumpers (set of 4)
- Cold plate cartridge