

**UTILITY CARTS, ENCLOSED****All Stainless Steel, Enclosed on Three Sides****"UCE" SERIES**

**Utility carts enclosed on three sides for secure storage, serving, and durability during transport**

- 1** Transport, serve, and store with FWE's heavy-duty UCE series enclosed Queen Mary utility carts - enclosed on three sides to protect less stable items such as dishes during transport or storage
- 2** All-welded construction with extra welds at critical points means lasting durability. The 16 gauge stainless steel shelves can easily transport your heaviest loads
- 3** Each stainless steel shelf has 6.5 to 9.5 square feet of working space. Models available with 3 to 6 shelf configurations
- 4** Easily transport over thresholds and various terrains - Large 8" EZ Roll polyurethane casters and heavy-duty base frame improve impact resistance, durability, and stability
- 5** Tubular push handles provide comfortable control
- 6** Full perimeter, non-marking bumper protects the unit and walls from dents and scratches
- 7** Quick and easy customization - custom sizing and shelf spacing are available to fit your unique operation


**\*Two year limited warranty**

**MODEL NOMENCLATURE**


Utility Cart, Enclosed    Space Between Shelves, In.  
**UCE** - **3** **15** - **62** Full Unit Width, In.  
 Number of Shelves



Heavy-Duty Welded  
Stainless Steel Construction



Tubular Welded Base Frame



Large EZ Roll Casters





Custom Sizing and  
Spacing Available

**STAINLESS STEEL**

# SPECIFICATIONS

## UTILITY CARTS, ENCLOSED

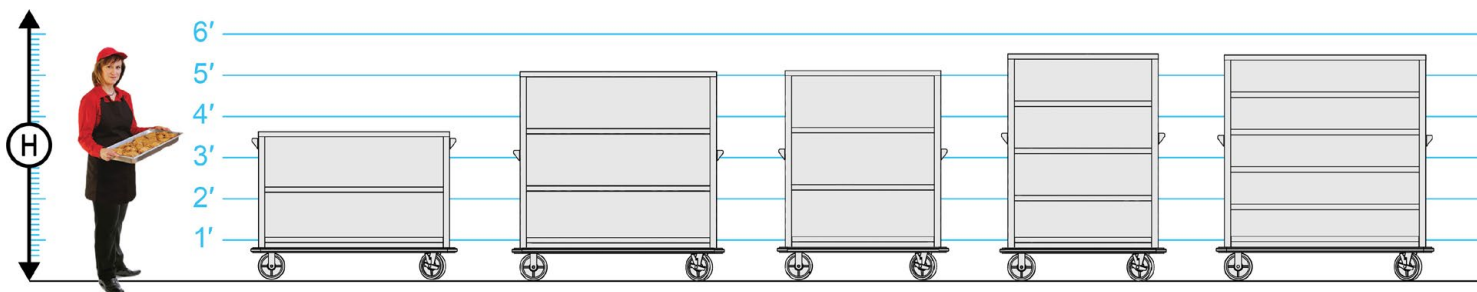

MODEL NUMBER	NUMBER OF SHELVES [A]	SHELF CLEARANCE (mm)	SHELF SIZE (mm)	OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)			CASTER SIZE	SHIP WT. LBS. (KG)
				HIGH "H"	DEEP "D"	WIDE "W"		
	3	15" (381)	53.5" x 23.75" (1358 x 603)	44.5" (1131)	28" (712)	62" (1575)	8"	325 (148)
	4	15" (381)	53.5" x 23.75" (1358 x 603)	61" (1550)	28" (712)	62" (1575)	8"	360 (164)
	4	15" (381)	41.5" x 23.75" (1054 x 603)	61" (1550)	28" (712)	50" (1270)	8"	270 (123)
	5	12" (304)	39.75" x 23.75" (1010 x 603)	65.5" (1664)	28" (712)	48" (1220)	8"	320 (146)
	6	9" (228)	53.5" x 23.75" (1358 x 603)	64.25" (1632)	28" (712)	62" (1575)	8"	450 (205)

Consult Factory for SHIPPING CLASS

[A] Number of shelves includes top surface.

**CONSTRUCTION.** Heliarc welded construction of stainless steel. Welded tubular base frame shall be 1.5" square, heavy gauge stainless steel tubing, with 10 gauge stainless steel reinforcing stress plates at corners. Three-sided enclosed 20 gauge stainless steel exterior.

**BUMPER.** Solid 1.5" wide continuous wraparound aluminum channel, bolted to frame, with snap-in, non-marking vinyl cushion. Shall be continuous, with corner cut-outs to facilitate cleaning.

**CASTERS.** 8" maintenance-free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge castor plate. The castor mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded-in-place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

**PUSH BAR HANDLE.** Heavy-duty 1" diameter tubular stainless steel push handles.

**SHELVES.** Shelf made of heavy-duty 16 gauge stainless steel.

### SHELVES

Custom shelf size & spacing  
Reinforced shelves

### CASTERS

Upgraded casters  
6 caster configuration

### DOORS

Locking doors

### EXTRAS

Top corner bumpers