

HEATED HOLDING CABINETS

For 18"x26" Size Trays and Various Size Containers on Shelves

TEMP SET RANGE: 90° - 190°F (32° - 88°C) 

TOP MOUNT "TST-SL" SERIES

Versatile holding meets high capacity demands inside of a shallow 23" depth

- 1 Ultra-flexible TST-SL series can accommodate a wide variety of containers on shelves and tray slides that are adjustable to change with your operation. Each set of tray slides can hold one shelf or one 18x26 tray. Each shelf can hold four GN1/3 pans
- 2 FWE's Top Mount TST-SL series eliminates hot and cold spots by gently circulating hot air throughout the interior of the cabinet
- 3 Fast Recovery - returns to set temperature quickly and features self-closing hinges - Don't worry about losing heat when opening and closing the door repeatedly during peak service times
- 4 Top mounted elements are protected from spillage and leaves the bottom of the cabinet open for easy cleaning, reducing maintenance and cleaning costs
- 5 Simple to Use Electronic Control, User Friendly, Easy to Read & Easy to Set. Temperature Set Range of 90°F to 190°F (32°C to 88°C). Provided with a Low Temperature Alarm
- 6 Place the unit anywhere - all units come with a tri-directional AC cord pocket to give you a better plug placement
- 7 Magnetic work flow door handle - magnetic operation eliminates the need for latch hardware and provides a cleaner look. Save time and money on replacement parts and maintenance fees; with no moving parts to bind or wear out

**Two year limited warranty*



Versatile Holding



Open Bottom Base



Control Panel




Tri-Directional Cord

TOPMOUNT

SPECIFICATIONS

HEATED HOLDING CABINETS

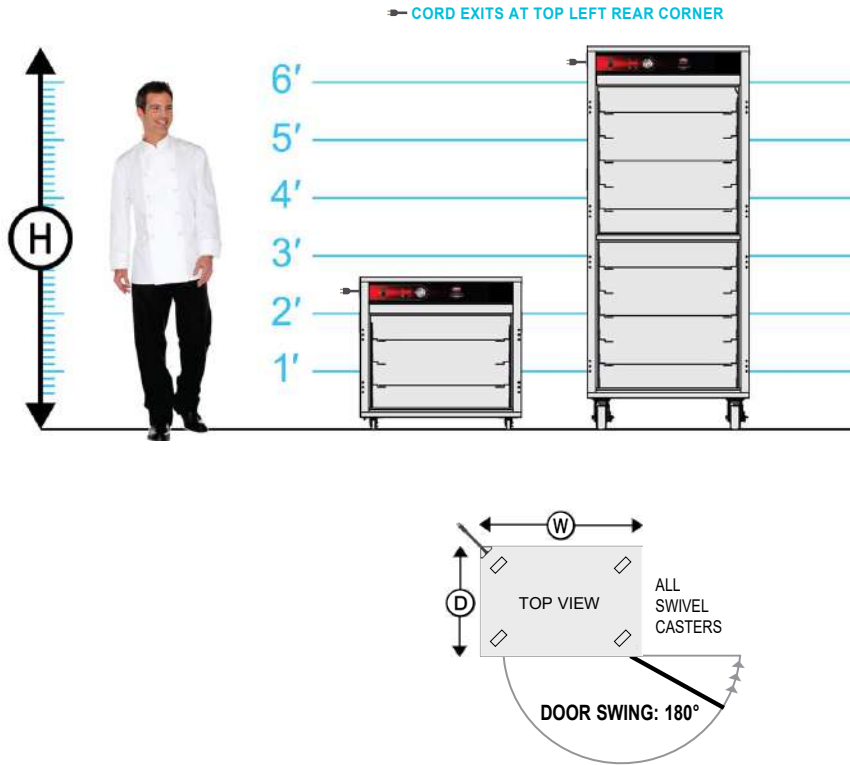

ELECTRICAL DATA			
MODEL NUMBER	TST-7SL		
VOLTS	120	208	220-240
WATTS	1700	1535	1985
AMPS	14.2	7.4	8.3
HERTZ	50/60	50/60	50/60
PHASE	Single	Single	Single
PLUG USA			
	5-15P*	6-15P	6-15P
PLUG CANADA			
	5-20P	6-15P	6-15P
MODEL NUMBER	TST-22SL		
VOLTS	120	208	220-240
WATTS	2200	1980	2580
AMPS	18.3	9.5	10.8
HERTZ	60	60	60
PHASE	Single	Single	Single
PLUG USA			
	5-20P*	6-15P	6-15P
PLUG CANADA			
	5-30P	6-15P	6-15P

MODEL NUMBER	SHELVES PROVIDED [B]	CAPACITIES [A]				OVERALL EXTERIOR DIMENSIONS IN.(mm)			CLASS 100		
		STANDARD NUMBER OF TRAY SLIDES @ 5" SPACINGS		OPTIONAL NUMBER OF TRAY SLIDES @ 2.5" SPACINGS		HEIGHT "H" DEEP "D" WIDE "W"			NO. OF DOORS	CASTERS	SHIP WT. LBS. (KG)
		TRAY SLIDES PROVIDED	18 x 26	TRAY SLIDES PROVIDED	18 x 26	HIGH "H"	DEEP "D"	WIDE "W"			
	2	4	4	7	7	33.5" (851)	23" (585)	33.5" (851)	1	2" ALL SWIVEL	250 (114)
	6	12	12	22	22	79" (731)	23" (585)	33.5" (851)	2 DUTCH	5" ALL SWIVEL	430 (195)

[A] Uprights punched on 2.5" centers. Tray slides are adjustable. Each tray slide accommodates one (1) 18" x 26" tray or one (1) shelf. 5" spacings are standard.

[B] 18" x 26" shelves can accommodate various size plates, containers, bain-maries or four each GN1/3 pans.

TST-SL models are available with: Pass-thru Door [add "P"] See-thru Lexan Door [add "L"]

CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 20 gauge polished exterior, 22 gauge stainless steel interior with easy-to-clean coved corners. Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10 gauge stainless steel reinforcing plates at corners.

INSULATION. Insulated throughout; top, back, bottom, sides, doors using high density ceramic and fiberglass insulation.

HANDLES. Form grip flush-in-wall hand grips recess mounted on each side of unit.

DOORS AND LATCHES. Flush mounted, stainless steel insulated doors shall be self-closing and field reversible. High temperature gasket sealed; gasket shall be cabinet mounted. Magnetic work flow door handle shall be full length, vertical, and positive closing.

TST-7SL is standard with horizontal work flow handle. Each door shall have two (2) heavy-duty edgemount die cast hinges. TST-22SL shall be standard with dutch doors. Dutch door: two (2) half size doors.

CASTERS. TST-22SL shall have 5" Polyurethane tire non-marking casters. TST-7SL shall have 2" TPR tire non-marking casters. Casters shall be in a configuration of four (4) swivel with brake. The caster mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

TRAY SLIDES. Stainless steel tray slides are fully adjustable / removable and designed to give secure bottom tray support. Removable stainless steel uprights shall be punched on 2.5" (63.5mm) spacing for easy tray/

pan adjustment, and shall easily lift off of heavy-duty, stainless steel brackets without the use of tools. Each pair of tray slides shall accommodate: one (1) 18" x 26" tray or one (1) 18" x 26" wire shelf.

HEATING SYSTEM / CONTROLS. Top mounted, forced air blower system shall include Hi-Temp, self-lubricated, impedance protected, fan-cooled blower motor to distribute heat equally throughout cabinet interior with distribution tunnels shall be vented for balanced air circulation. Electronic controls shall include an easy to read digital display of cabinet temperature (with recall capacity of temperature set point and actual cabinet temperature), equipped with a programmable low temperature alarm, master ON/OFF switch with power indicator light. Adjustable temperature range from 90°F to 190°F (32°C to 88°C).

ELECTRICAL CHARACTERISTICS. 3 wire grounded tri-directional power cord and plug, rear mounted for safety. See electrical data chart above for amperage and receptacle configuration. See electrical data chart for models that may require a dedicated circuit.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

- ELECTRICAL**
- Low wattage model with 15 amp plug
 - Concealed thermostat
 - Mechanical controls
 - 220 volt, 50/60 Hz, single phase
- DOORS**
- Key locking door latch
 - See-thru Lexan door
 - Pass-thru door
 - Paddle latch
 - Padlocking latch
 - Left hand door hinging
- EXTRAS**
- Legs
 - Extra tray slides
 - Extra shelves
 - Dry erase board
 - Menu card holder