




MODEL	LENGTH	WIDTH	PAN CAPACITY 12" X 20"	CUTOUT DIM				WATTS (HEATED)	HP	AMPS 60/1PH			SHIP WT (LBS)
				UNIT		CONTROL PANEL				120V (REFRIG)	208V (HEATED)	240V (HEATED)	
				L	W	L	W						
RCHB-2	31-1/16"	26-1/8"	2	29-1/2"	25"	14"	6"	1100	1/4	3.5	5.3	4.5	110
RCHB-3	44-1/16"	26-1/8"	3	42-1/2"	25"	14"	6"	2200	1/4	3.5	10.6	9.2	135
RCHB-4	57-1/16"	26-1/8"	4	55-1/2"	25"	14"	6"	3300	1/4	3.5	15.9	13.8	160
RCHB-5	70-1/16"	26-1/8"	5	68-1/2"	25"	14"	6"	4400	1/4	3.5	21.2	18.3	185
RCHB-2-AF	33-11/16"	26-1/8"	2	32-1/4"	25"	14"	6"	1100	1/4	3.5	5.3	4.5	120
RCHB-3-AF	46-11/16"	26-1/8"	3	45-1/4"	25"	14"	6"	2200	1/4	3.5	10.6	9.2	145
RCHB-4-AF	59-11/16"	26-1/8"	4	58-1/4"	25"	14"	6"	3300	1/4	3.5	15.9	13.8	170
RCHB-5-AF	72-11/16"	26-1/8"	5	71-1/4"	25"	14"	6"	4400	1/4	3.5	21.2	18.3	195

Exhaust side

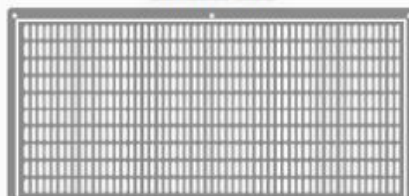

Exhaust

Total Exhaust Area = 88.7 in²

Exhaust Area slots : 10 x 54 = 540 slots

Perforation size : 0.75 in x .22 in (19 mm x 5.5mm)

Air Intake

Total Air Intake Area = 88.7 in²

Air Intake Area : 10 x 50 & 2 x 20 = 540 slots

Perforation Size : 0.75 in x .22 in (19 mm x 5.6 mm)

Air Intake side

