



PL-8369

Fountain Series
Kitchen Pot Filler

Features

- Single Lever Handle with Main Lever Shutoff
- Cold Water Connection Only
- Ceramic Disc Valves Exceed Industry Longevity Standards for a Lifetime of Durable Performance
- 2.2 gal/min (8.3 l/min) Maximum Flow Rate [Max at 60 psi (4.1 bar)]
- Flexible Supplies for Simplified Installation



Material

- Premium Metal Construction
- Finishing Resists Corrosion and Tarnishing
- Ceramic Cartridge

Available Color/Finishes

Intended for reference only

Color	Description
	Brushed Nickel
	Matte Black
	Brushed Gold

Installation

- Wall-Mount

Codes/Standards

- ADA Compliant


6140 Ulmerton Road Clearwater, FL 33760
Phone: (727) 388-9895
Fax: (727) 362-1281

For the most current Specification Sheet, go to www.buildpelican.com





PL-8369
Fountain Series
Kitchen Pot Filler

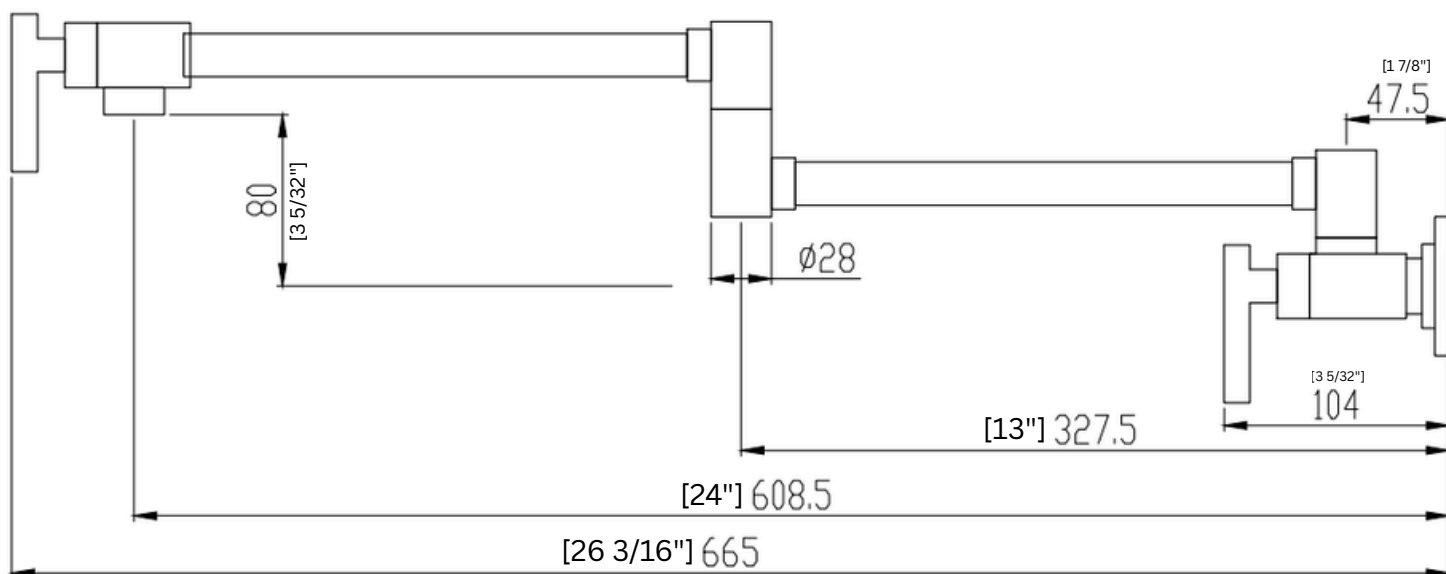

Technical Information

All product dimensions are nominal

Spout Length: 24"
Spout Height: 3 5/32"

Flow Rate: 2.2 gal/min (8.3 l/min)
Pressure: 60 psi (4.1 bar)
Valve Body: Lead Free Brass

Installation Information

Install this product according to the installation instructions.

Limited Lifetime Warranty

See website for detailed warranty information.

JOB INFORMATION

JOB NAME: _____ MODEL SPECIFIED: _____ QUANTITY: _____
DATE: _____ ARCHITECT/ENGINEER: _____
CUSTOMER: _____ CONTRACTOR: _____

6140 Ulmerton Road Clearwater, FL 33760
Phone: (727) 388-9895
Fax: (727) 362-1281

For the most current Specification Sheet, go to www.buildpelican.com

