

# ALUMINUM RACKS

Transport 18"x 26" Trays, 12"x 20" Pans, and Oval Trays

## "OTR" SERIES

*Economical and functional aluminum racks for transport, bussing, and storage*

- 1** Choose from a variety of versatile aluminum racks to accommodate your specific needs
- 2** Fabricated from high tensile extruded aluminum with all welded, tubular construction, these racks provide sturdy, light-weight, and economical storage and transport
- 3** 5" heavy-duty, non-marking polyurethane casters for easy maneuverability even when fully loaded
- 4** These racks are easy to clean and can be completely sanitized, washed, or steam cleaned while remaining rust resistant
- 5** Save significant kitchen space by organizing all various trays and/or pans in one convenient location
- 6** Facilitates proper cooling of freshly baked goods



**1**

**Fixed Rack**  
18"x 26" Trays


**Universal Fixed Rack**  
18"x 26" Trays, 12"x 20" Pans

**Universal Adjustable Rack**  
18"x 26" (and Oval) Trays, 12"x 20" Pans


**Wide Angle Universal Fixed Rack**  
Oval and 18"x 26" Trays, 12"x 20" Pans



Versatile Holding



All Welded Tubular Design



5" Polyurethane Casters




Rust Resistant

*\*Two year limited warranty*


# ALUMINUM

# SPECIFICATIONS

# ALUMINUM RACKS

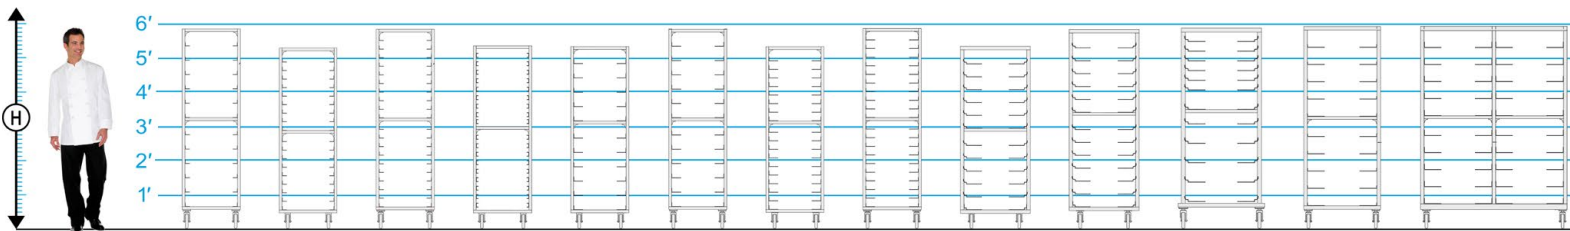

MODEL NUMBER	CAPACITIES			TRAY SLIDE SPACINGS (mm)	TRAY GUIDE LEDGE SIZE (mm)	OVERALL EXTERIOR DIMENSIONS IN.(mm) (Height Includes Casters)			Consult Factory for SHIPPING CLASS	
	18 x 26	12 x 20	OVAL			HIGH "H"	DEEP "D"	WIDE "W"	CASTER SIZE	SHIP WT. LBS. (KG)
<b>18"x 26" RACKS - FIXED SPACINGS</b>										
	12	-	-	5" (127)	1.875" (48)	69.75" (1772)	26" (661)	20.5" (521)	5"	125 (57)
	18	-	-	3" (76)	1.875" (48)	63.75" (1610)	26" (661)	20.5" (521)	5"	130 (59)
	20	-	-	3" (76)	1.875" (48)	69.75" (1772)	26" (661)	20.5" (521)	5"	135 (62)
	34	-	-	1.5" (38)	1.5" (38)	64.5" (1626)	26" (661)	20.75" (528)	5"	140 (64)
<b>18"x 26" AND 12"x 20" RACKS - FIXED SPACINGS</b>										
	11	11	-	5" (127)	3.125" (79)	64" (1772)	26" (661)	20.5" (528)	5"	110 (50)
	12	12	-	5" (127)	3.125" (79)	69.75" (1772)	26" (661)	20.5" (528)	5"	120 (55)
	18	18	-	3" (76)	3.125" (79)	64" (1772)	26" (661)	20.5" (528)	5"	115 (53)
	20	20	-	3" (76)	3.125" (79)	69.75" (1772)	26" (661)	20.5" (528)	5"	130 (59)
<b>UNIVERSAL RACKS - ADJUSTABLE ON 1.5" SPACINGS</b>										
	12	24	12	4.5" (114)	6.125" (156)	64" (1772)	26" (661)	24.5" (623)	5"	120 (55)
	13	26	13	4.5" (114)	6.125" (156)	69.5" (1766)	26" (661)	24.5" (623)	5"	145 (66)
	12	24	12	4.5" (114)	6.125" (156)	69.75" (1545)	26" (661)	25" (635)	5"	150 (69)
<b>OVAL TRAY RACKS - WIDE ANGLE FIXED SPACINGS</b>										
	10	20	10	6" (152)	6.75" (171)	71.25" (1810)	30" (762)	26.5" (674)	5"	155 (71)
	20	40	20	6" (152)	6.75" (171)	71.25" (1810)	30" (762)	51.75" (1315)	5"	220 (100)



**CONSTRUCTION.** Heavy-duty extruded type 6063 aluminum alloy. All uprights and runners are fully welded.

**CASTERS.** 5" durable, non-marking, easy rolling, all swivel, polyurethane tire casters with 1.5" wheel shall be bolted to heavy-duty stress plate that is welded to the tubular frame.

**TRAY GUIDES.** Fixed rack tray slides (OTR-1826, OTR-FUA, and OTR-OT) are welded to the uprights. OTR-UA tray guides are adjustable on 1.5" spacings. Spacings and ledge size vary in dimensions for intent of purpose and are indicated on the chart above.

#### CASTERS

2 (two) rigid casters  
2 (two) casters with brakes  
4" high-temp casters (-20°F - 425°F)

#### EXTRAS

Rear pan stop  
8" vertical bumpers  
Perimeter bumper  
Solid base