

## QUEEN MARY RACKS 271 SERIES

### FEATURES AND BENEFITS:

- Durable Queen Mary rack ideal for transporting plated banquet meals and returning soiled dishware to ware washing area.
- All riveted framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Shelves have raised "marine" edges; prevents tray slide and retains spillage.
- Two models available:  
5 shelves with 11" clearance - Model 271-51-5927  
6 shelves with 8" clearance - Model 271-61-5927
- Side mounted push handles for ease of transporting.
- Standard perimeter bumper protects surfaces.
- Heavy duty 8" polyurethane casters, two swivel with brakes make maneuvering easy.




271-61-5927



### ACCESSORIES and OPTIONS (Available at extra cost):

- Stainless Steel Shelves

# 271 Series

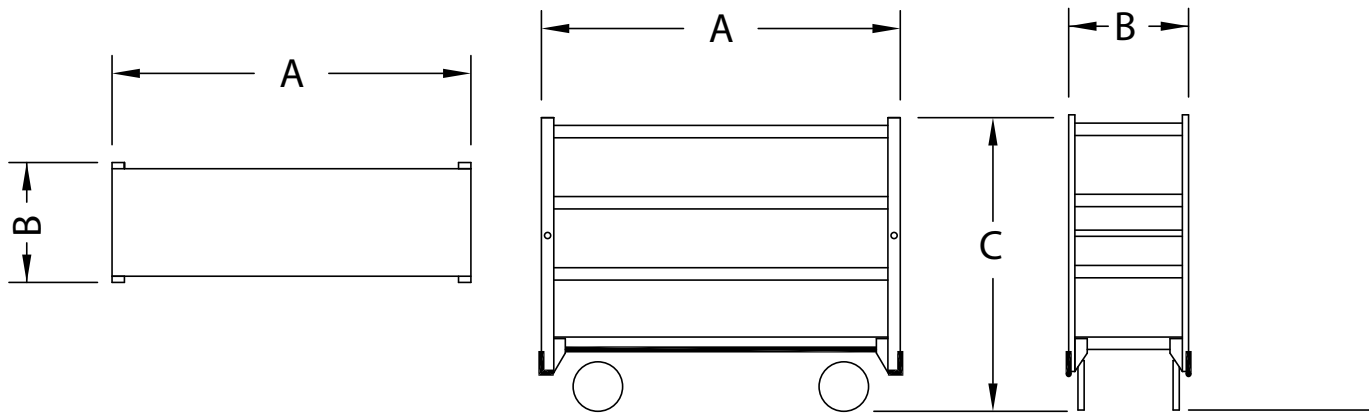

CRES COR MODEL NO.	NO. OF SHELVES		DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
			WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	*HEIGHT		
271-51-5927	5	IN	62-1/4	29	62-11/16	55-1/4	25	11	LBS	156
		MM	1585	740	1595	1405	635	280	KG	71
271-61-5927	6	IN	62-1/4	29	62-11/16	55-1/4	25	8	LBS	156
		MM	1585	740	1595	1405	635	205	KG	71

NOTES: 1. For oval tray sizes: 20-3/4" x 25-1/2", 22-3/4" x 27-5/8" and 23-1/2" x 29". Two trays per shelf.  
 2. \*Inside height dimension is between shelves.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

## RACK:

- Posts: Extruded channels, 1 x 2 x .125.
- Shelves: Formed one piece .063 aluminum with 1/4" marine edges on the two 62" sides; reinforced with .063 aluminum channels.
- Optional stainless steel shelves are 16 ga. type 304.  
 271-52-5927: Five shelves spaced with 11" clearance.  
 271-62-5927: Six shelves spaced with 8" clearance.
- Shelf corners and bottom gussets: .100 aluminum riveted to posts and shelves.
- Push handles (2): 1" dia. aluminum tubing, gray plastic coated.
- Bolsters: Formed .190 aluminum; welded to posts, casters attached.
- Casters: 8" dia., polyurethane tires, 2" wide, load cap. 900 lbs. each, temp. range -30°/+180°F. Bearings are sealed and permanently lubricated. Two swivel casters equipped with brakes and two rigid casters.
- Bumper: 1" wide gray rubber, perimeter type.

## SHORT FORM SPECIFICATIONS

Cres Cor Queen Mary Rack Model 271-\_\_\_\_-5927.  
 Extruded aluminum construction reinforced with riveted gussets. (\_\_\_\_) aluminum (or) stainless steel shelves with 1/4" marine edges with (\_\_\_\_) clearance. Push handle on each end. 8" polyurethane casters, 2 swivel, 2 rigid, permanently lubricated, sealed ball bearings. Load capacity 900 lbs. each, temperature -30° to +180°F. 2 Year Parts / 1 Year Labor Warranty. NSF Listed. NSF Listed.



5925 Heisley Road • Mentor, OH 44060-1833  
 Phone: 877/CRESCOR • Fax: 440/350-7267  
 www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.