

## NON-INSULATED TRANSPORT STORAGE CABINETS 100 SERIES

### FEATURES AND BENEFITS:

- Non-insulated all purpose cabinet for transport and storage.
- Same size top and base extend past sidewalls to act as natural bumpers for protection. Extruded frame fully welded
- Body constructed of non-corrosive, Hi-Tensile aluminum for strength and ease of mobility
- Reinforced, full length door swings 270° and can be latched to the cabinet side for convenience. Card clip included.
- Gravity type latch secures door during transport.
- Corrugated sidewalls securely hold 18" x 26" pans on 1-1/2" centers without tipping. Provides added strength.
- Interior pan stops on door allow proper air flow.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.




100-1841D



### ACCESSORIES and OPTIONS (Available at extra cost):

- Lock Hasp
- Various Caster Options
- Corner Bumpers
- Perimeter Bumper
- Floor Lock (for use with 5" casters)
- Plexiglas Door
- Push Handle
- Bail Handle Kit
- Left-Hand Hinged Door
- Pass-Thru version of 100-1841D
- Kold Keepers

See page A-20 for accessory details.

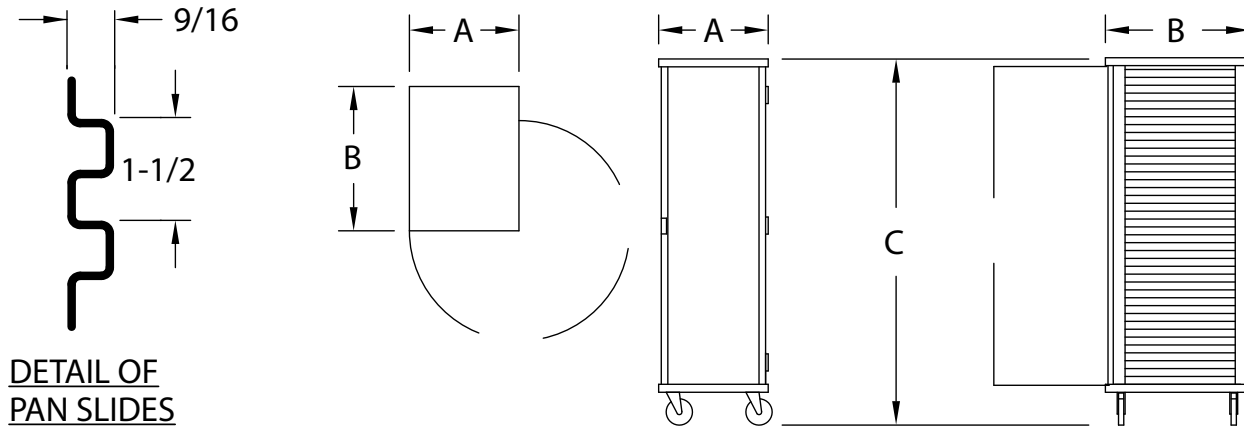

DETAIL OF PAN SLIDES

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
100-1841D	40	18 X 26	IN	20-7/8	27-1/2	69-3/4	18-1/16	26	61-1/2	LBS	105
		460 X 660	MM	530	700	1775	460	660	1565	KG	48
100-1833D	32	18 X 26	IN	20-7/8	27-1/2	57-3/4	18-1/16	26	49-1/2	LBS	93
		460 X 660	MM	530	700	1470	460	660	1260	KG	42
100-1822D	22	18 X 26	IN	20-7/8	27-1/2	42	18-1/16	26	33-3/4	LBS	75
		460 X 660	MM	530	700	1070	460	660	860	KG	34

NOTE: Send sample pan or tray with order when using any that are not an 18" x 26" pan with heavy beaded edge. When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

**CABINET:**

- Posts: Extruded channels, 7/8 x 2-1/4 x .102, welded to top and base, form a solid frame.
- Sides: .063 corrugations riveted to posts.
- Back panel: Fitted into posts, riveted to top and reinforced.
- Tie rod: Applied at front of all cabinets 57-3/4" high and over.
- Top: One piece .100 aluminum.

**BASE:**

- One piece construction, .190 aluminum.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front casters equipped with brakes.

**DOOR:**

- Panel: Formed .100 aluminum.
- Reinforcement: 1/4 x 1-1/2 extruded bars riveted horizontally to top, center and bottom.
- Latch: Gravity type, nickel plated steel.
- Swings 270° on 2 or 3 butt hinges, riveted to posts and door.
- Pan stop channel.

**PAN SLIDES:**

- Corrugations act as pan slides on 1-1/2" centers.

**SHORT FORM SPECIFICATIONS**

Cres Cor Utility Cabinet Model 100-18\_\_\_D. Formed and welded .100 aluminum top, .190 aluminum base. No-tip .063 corrugated aluminum sides for (\_\_\_) 18" x 26" pans on 1-1/2" centers. Formed .100 aluminum reinforced door. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: \_\_\_\_\_. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833  
 Phone: 877/CRESCOR • Fax: 440/350-7267  
 www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.