

## INSULATED HALF-SIZE TRANSPORT CABINET MODEL 309-128C (FOR 12" X 20" PANS)

### FEATURES AND BENEFITS:

- Fully insulated half-size cabinet for transport of cold or hot foods.
- Internal frame in body and door for structural rigidity.
- Body constructed of non-corrosive, Hi-Tensile aluminum for strength and ease of mobility.
- Safety-conscious anti-microbial latch protects against spreading germs.
- Insulated field reversible door for flexibility. Standard with right hand hinging; left hand hinging available upon request.
- Magnetic latch for "easy open"; twist-lock catch secures door during transport. Latch and hinges mounted inboard.
- Removable wire pan supports for easy cleaning hold 12" x 20" pans on 2-3/4" centers.
- Interior pan stops on inside of door and back allow for proper air flow.
- Convenient lift handles fold flat against sides of cabinet.
- Heavy duty 5" swivel casters, two with brakes. Staggered mounting provides mobility when fully loaded especially over uneven surfaces.
- Cabinets can be stacked for flexibility; specify optional stacking kit.





309-128C



### ACCESSORIES and OPTIONS (Available at extra cost):

- Key Lock Handle
- Stacking Kit
- Various Caster Options
- Corner Bumpers
- Perimeter Bumper
- Kold Keepers

See page A-20 for accessory details.

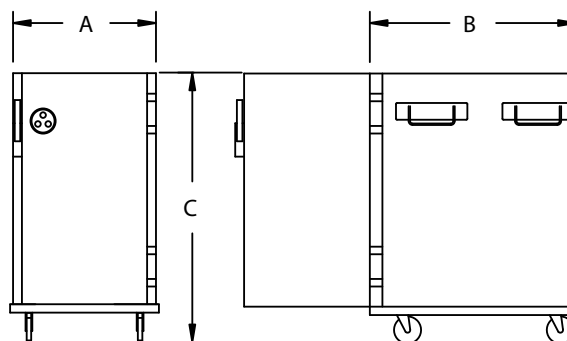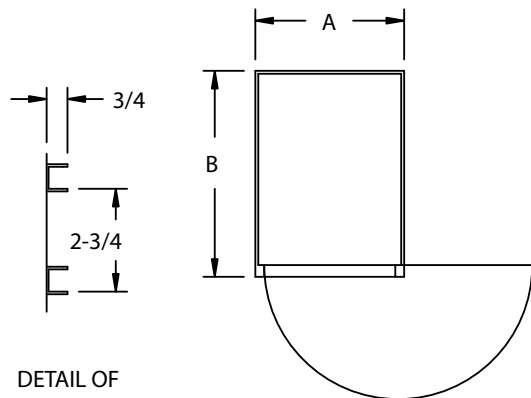

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
309-128C	8	12 x 20	IN	18-7/8	27-1/4	33-7/8	13-3/16	21-1/4	24-7/8	LBS	92
		305 x 510	MM	480	695	860	335	540	635	KG	42

NOTES: 1. When ordering bumpers, add 2" to overall dimensions.  
 2. When stacking two cabinets, width will increase to 24-5/8".

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

**CABINET:**

- Body: .063 aluminum.
- Reinforcement: Internal framework of channels, 1 x 3/4 x .125.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F. 1-1/2" in walls and door; 1" in top and bottom.
- Pan stop channels: Mounted to inside rear of cabinet and door.
- Bail handles: Two mounted to each side.

**BASE:**

- One piece construction, .190 aluminum.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front casters equipped with brakes.

**DOOR:**

- Field reversible.
- Formed .063 aluminum.
- Latch: Anti-microbial chrome plated zinc with composite handle, magnetic type; mounted inboard.
- Hinges: Heavy duty chrome plated zinc; mounted inboard.
- Gasket: Perimeter type, silicone.
- Transport latch.
- Vent: Adjustable.

**PAN SLIDES:**

- Flat wire racks, .104 x 5/8 nickel chrome plated steel, spaced on 2-3/4" centers.

**SHORT FORM SPECIFICATIONS**

Cres Cor Insulated Half-Size Cabinet Model 309-128C. Inner, outer and top liners of .063 aluminum, reinforced with channels. Formed .063 aluminum door. Field reversible door. Fiberglass insulation in walls and door 1-1/2"; top and bottom 1". Welded and finished .190 aluminum base. Removable pan supports for (8) 12" x 20" pans on 2-3/4" centers. Two bail handles on each side. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: \_\_\_\_\_  
 \_\_\_\_\_ NSF listed.