

MENUMASTER[®] Commercial

Project #: _____

Item #: _____



Medium Volume

Menumaster[®] Commercial Microwave MCS/RCS/CRCS Series

Power Output

- 1000-1100 watts of power

Available with Touch or Dial Controls

- **Touch controls:**
 - 100 programmable menu items simplifies cooking
 - 5 power levels and 4 cooking stages for cooking flexibility
 - Multiple quantity pad calculates the proper cooking times for multiple portions
- **Dial Controls:**
 - Timer automatically resets to zero if door is opened during heating
 - 10 minute digital timer lights up for "at-a-glance" monitoring
 - 4 power levels

Easy to Use

- See-through door and lighted interior for monitoring without opening the door
- 34 liter (1.2 cubic foot) capacity accommodates a 356mm (14") platter, prepackaged foods and single servings

Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a professional look.
- Non-removable air filter protects oven components.
- Interior borosilicate tray is sealed and recessed to reduce plate-to-shelf edge impact and keep spills contained
- Constructed to withstand the foodservice environment, multiple users and variable ambient temperatures

Optional Accessories

- Oven cavity shelf (SE10)
- Non-stick baskets (TB10/S, SB10/S, MB10S, NB10, OB10)

Service

All products are backed by the ACP, Inc.
24/7 ComServ Support Center

Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at www.acpsolutions.com/warranty

Safety and Sanitation

This ACP, Inc. product meets and exceeds safety and sanitation standards set for commercial microwave ovens by UL, ETL, NSF, CSA, FDA, ETL EU, CE, and Standards Association of Australia (SAA) Regulatory Compliance Mark (RCM) certified.



Restaurant Line | Medium Volume This category of microwave oven is ideal for...

Applications

- Server Stations
- Convenience Stores
- Concessions
- Coffee shops
- Breakrooms
- Vending

Boost heats and re-therms foods in seconds

- Breakfast sandwich reheats in 1:00
- Stage cooking perfectly prepares instant oatmeal in 1:30

Defrost


- Defrosts most frozen food products

All ACP, Inc. commercial ovens are supported by our Culinary Center. Do not hesitate to contact us for any questions regarding food preparation, menu development and cooking times: testkitchen@acpsolutions.com



© 2023 ACP, Inc.
Cedar Rapids, Iowa 52404

MenuMaster® Commercial Microwave MCS/RCS/CRCS Series | Medium Volume

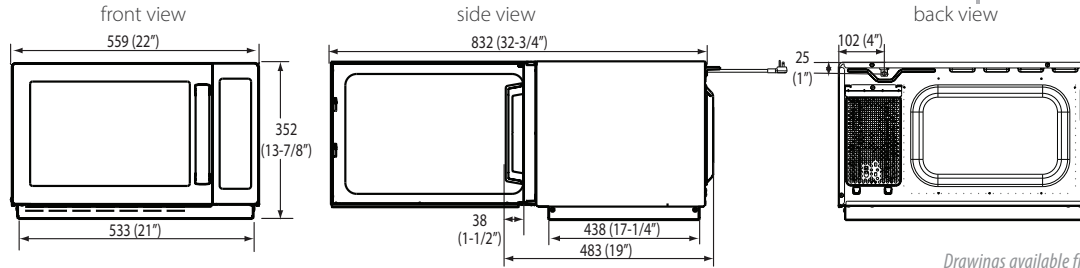

Drawings available from KCL CADlog - techs@kclcad.com

Dimensions			
Exterior	H 352 (13 7/8")	W 559 (22")	D† 483 (19")
Cavity	H 216 (8 1/2")	W 368 (14 1/2")	D 381 (15")
Usable Cavity Space	34 liter (1.2 cubic ft.)		
Door Depth	832 (32 3/4"), 90°+ door open		
Installation Clearances	Top: 51 (2")	Sides: 25 (1")	Back: None
Shipping Carton	H 422 (16 5/8")	W 640 (25 3/16")	D 502 (19 3/4")
Weight			
Product Weight	Ship weight (approx.)	UPS Shippable	
19 kg. (41 lbs.)	21 kg. (47 lbs.)	Yes	

Features	Touch Models (TS)	Dial Models (DSE)
Configuration	Countertop	Countertop
Stackable	Yes	Yes
Display	VFD	Lighted Dial
Control System	Touchpad	Dial
Programmable Control	Yes, 10 pads	No
Braille	Yes	No
Settings Programmable	100	-
Max. Cooking Time	60:00	10:00
Microwave Distribution	Rotating antenna, top	Rotating antenna, top
Power Levels	5	4
Defrost	Yes, 20% power	Yes, 20% power
Time Entry Option	Yes	Yes
Multiple Portion Setting	Yes, X2	No
Stage Cooking	4 stages	1 stage
Interior Light	Yes	Yes
Automatic Voltage Sensor	No	No
Air Filter	Non-removable with cleaning reminder	Non-removable
Signal	End of cycle, adjustable	End of cycle
Door Handle	Grab & Go	Grab & Go
Exterior Finish	Stainless steel	Stainless steel
Interior Finish	Stainless steel	Stainless steel

Measurements are millimeters. Measurements in () are US Standard

* IEC 60705 Tested

† Includes handle

EMEA = Europe, the Middle East and Africa; APAC = Asia Pacific and Oceania; LATAM = Latin America

Electrical Configuration

Region	Model#/UPC	Control System	Power Consumption	Power Output (microwave)	Power Source	Plug Configuration	Cord Length	Frequency	Magnetron
North America single phase	MCS10TS 728028020748	Touch	1500 W	1000 W*	120V, 60 Hz, 15A, single phase	NEMA 5-15P	1.5m (5 ft.)	2450MHz	1
North America single phase	MCS10DSE 728028129472	Dial	1500 W	1000 W*	120V, 60 Hz, 15A, single phase	NEMA 5-15P	1.5m (5 ft.)	2450MHz	1
EMEA, APAC, LATAM single phase	RCS511TS 728028020762	Touch	1770 W	1100 W*	230-240V, 50 Hz, 16A, single phase	CEE 7/7 "Schuko"	1.5m (5 ft.)	2450MHz	1
EMEA, APAC, LATAM single phase	RCS511DSE 728028129489	Dial	1770 W	1100 W*	230-240V, 50 Hz, 16A, single phase	CEE 7/7 "Schuko"	1.5m (5 ft.)	2450MHz	1
EMEA (UK), APAC single phase	RCS511TSU 728028244519	Touch	1770 W	1100 W*	230-240V, 50 Hz, 13A, single phase	BS1363/A	1.5m (5 ft.)	2450MHz	1
Australia single phase	RCS511TSA 728028244397	Touch	1770 W	1100 W*	230-240V, 50 Hz, 10A, single phase	Type 1 Australia	1.5m (5 ft.)	2450MHz	1
Australia single phase	RCS511DSEA 72802244403	Dial	1770 W	1100 W*	230-240V, 50 Hz, 10A, single phase	Type 1 Australia	1.5m (5 ft.)	2450MHz	1
Brazil single phase	MCS10TSB 728028244571	Touch	1650 W	1000 W*	220V, 60 Hz, 10A, single phase	NBR14136	1.5m (5 ft.)	2450MHz	1
China single phase	CRCS511TS 728028129380	Touch	1770 W	1100 W*	220V, 50 Hz, 10A, single phase	DMP-19B	1.5m (5 ft.)	2450MHz	1
India single phase	RCS511TSI 728028315905	Touch	1770 W	1100 W*	230-240V, 50 Hz, 16A, single phase	BS546	1.5m (5 ft.)	2450MHz	1
Philippines single phase	MCS10TSP 728028316063	Touch	1650 W	1000 W*	220V, 60 Hz, 15A, single phase	NEMA 5-15P	1.5m (5 ft.)	2450MHz	1
Saudi Arabia single phase	MCS10TSSA 728028315912	Touch	1650 W	1000 W*	220V, 60 Hz, 13A, single Phase	BS1363/A	1.5m (5 ft.)	2450MHz	1

ACP INC. 225 49th Ave. Dr. SW, Cedar Rapids, IA 52404 U.S.A.
800-233-2366 • 319-368-8120 • Fax: 319-368-8198
www.acpsolutions.com

Part No. 20271702
Updated 2/23/2023
© 2023 ACP, Inc., Cedar Rapids, Iowa 52404

an Ali Group Company



The Spirit of Excellence

Specification #:

AIA File #: