



## Features

### **Eco-Friendly Refrigerant**

R290 refrigerant with a global warming potential (GWP) of 3

### **High-Strength Door**

Heavy-duty, stainless steel door is assembled using high-load brackets for long lasting durability

### **Easy to Clean**

Stainless steel interior, coved corners, finished edges

### **Stainless Steel Exterior**

Galvanized back and stainless steel bottom to reduce the risk of corrosion

### **High-Density Insulation**

Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation

### **Cold Wall Refrigeration System**

Optimized temperature control thanks to the cold wall refrigeration

### **Front Access Dispense Point**


Includes a wide, front-access flapper door for easy access to fresh produce while maintaining an optimal holding environment

### **Cabinet Capacity**

Internal area of 4.7ft<sup>3</sup> with one product bin with removeable lid and front access door

### **Versatility**

Standard countertop design includes optional wall mount accessory to free up counterspace

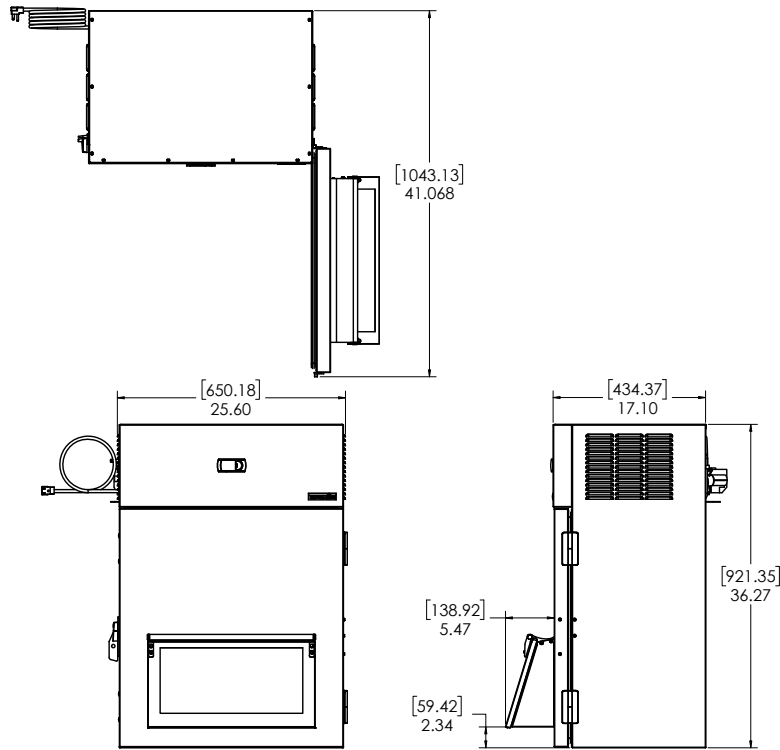

## Technical Specifications

<b>Electrical Requirements</b>	115v/60hz/1ph/3A/NEMA 5-15P Plug
<b>Product Dimensions</b>	25.6"W x 36.27"H x 23.57"D (65.02cm x 92.13cm x 59.87cm)
<b>Product Weight</b>	130lbs (58.97kg)
<b>Shipping Dimensions</b>	31"W x 45"H x 32"D (78.74cm x 114.30cm x 81.28cm)
<b>Shipping Weight</b>	145lbs (65.77kg)
<b>Shipping Cubic Dimensions</b>	25.83ft <sup>3</sup> (0.73m <sup>3</sup> )
<b>Refrigerant</b>	R290
<b>Charge Level</b>	1.9oz (53.9 grams)

<b>Temperature Range</b>	36 to 40 (2.2 to 4.4°C)
<b>Insulation</b>	Foamed-in-place, CFC-free polyurethane
<b>Exterior Construction</b>	Stainless steel exterior with galvanized back
<b>Interior Construction</b>	Stainless steel interior with coved corners and finished edges
<b>Doors</b>	One (1) right-hand swing door, reversible
<b>Interior Capacity</b>	4.7 cubic feet
<b>Certifications</b>	ETL Safety, ETL Sanitation
<b>Warranty</b>	1-year parts and labor, 5-year compressor (part only)

Model Number	Description
SKDL25-ESUS2	Cold holding Refrigerator 25", 115v/60hz/1ph, single right-hand swing door, product bin, NEMA 5-15P

To learn more about **Cold Holding Refrigerator**, visit [silverking.com](http://silverking.com)