



Features

Eco-Friendly Refrigerant

R290 refrigerant with a global warming potential (GWP) of 3

Easy to Clean

Stainless steel interior with coved corners, finished edges, and removable lids

High-Density Insulation

Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation

Cold Wall Refrigeration System

Optimized temperature control thanks to the cold wall refrigeration and top access

Heavy-Duty Construction

Stainless steel exterior plus galvanized lower cabinet and base reduce the risk of corrosion

Folding Hinged Lid


Insulated, front and back hinged lid for easy top access

Cabinet Capacity

Maximized interior storage area of 0.96ft³

Integrated Design

Fitted flange design ensures the fit within any countertop

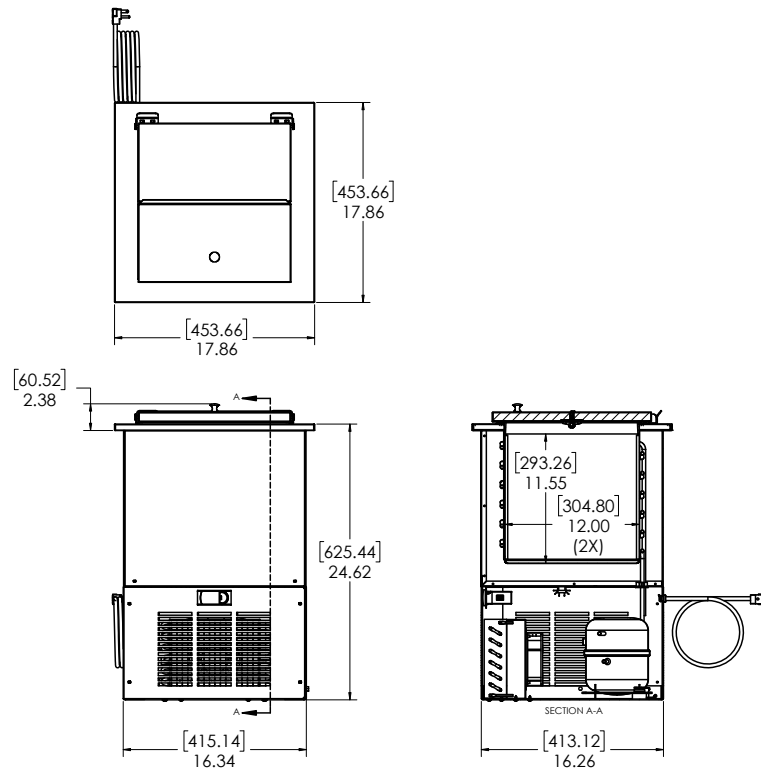

06.10.22

Technical Specifications

Electrical Requirements	115v/60hz/1ph/2.1a NEMA 5-15P
Product Dimensions	17.86"W x 26.4"H x 17.86"D (45.36cm x 67.06cm x 45.36cm)
Product Weight	75lbs (34.02kg)
Shipping Dimensions	23"W x 32"H x 23"D (58.42cm x 81.28cm x 58.42cm)
Shipping Weight	80lbs (36.29kg)
Shipping Cubic Dimensions	9.8ft ³ (0.28m ³)
Temperature Range	-5 to 5°F (-20.6 to -15°C)
Refrigerant	R290
Charge Level	1.6oz (45.4 grams)

Insulation	Foamed-in-place, CFC-free polyurethane
Exterior Construction	Stainless steel exterior with galvanized bottom
Interior Construction	Stainless steel interior with coved corners and finished edges
Lids	Front and back, insulated, hinged, removable
Internal Capacity	0.96ft ³ (0.03m ³)
Certifications	ETL Safety, ETL Sanitation
Warranty	1-year parts and labor, 5-year compressor (part only)

Model Number	Description
SKFDI18-ELUS1	Drop-In Freezer 18", 115v/60hz/1ph, insulated hinged lids, NEMA 5-15P

To learn more about **Drop-In Freezer**, visit silverking.com