

Specification/Data sheet


UltraVent XS



Article number: 60.74.254

Description

The UltraVent XS gets rid of the steam emitted with its condensation technology. No connection to the outside or extension of an existing exhaust system is necessary with this air recirculation hood. Installation is simple, and the hood can be retrofitted at any time.

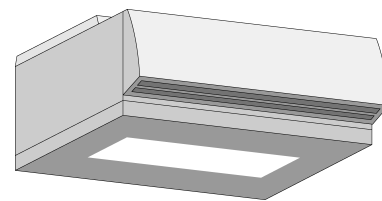

Features

- Reliably binds escaping steam and vapours thanks to the high extraction rate
- Easy-to-clean grease filter (CNS), dishwasher safe
- Proximity door contact switch
- Automatically boosts extraction rate when cooking cabinet door is opened

Technical Specifications

- Connection: 125V 1 NAC 60 Hz
- Connected load: 160-215W
- Extraction capacity: 9,900 - 20,000 ft³/h (280-560 m³/h)
- Operating noise: 70 dBA
- Width: 25 7/8" (657 mm)
- Height: 9 1/2" (240 mm)
- Depth: 22 3/4" (580 mm)
- Weight: 66 lbs (30 kg)
- Certifications: UL, NSF

Material

- Rust-free stainless steel (CNS 1.4301)

Note

- The local standards and regulations for ventilation systems must be adhered to
- The UltraVent XS condensation hood can be used for right-sided units as well as for left-sided units. An installation option for both variants is included in the scope of delivery.
- The UltraVent XS includes an adapter kit for optional installation on a Combi-Duo XS.

