




PX-H

## PX-H HUB

For the Xvive PX System

### FEATURES

- Expands the Xvive PX System by distributing three channels of audio from one PX-B Snake to up to five PX-A Mixers via Cat 5 cables
- One Ethernet input
- Five Ethernet outputs
- Includes a 19" 1U rackmount kit
- For use with one Xvive PX-B Snake, and up to five PX-A Mixers and EC25 Ethernet cables
- If a 9V/2A center-negative DC power supply is plugged into the connected PX-B Snake, it can power up to five PX-A Mixers through PoE (Power over Ethernet)

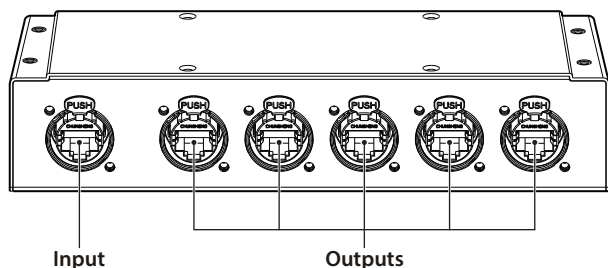

### SPECIFICATIONS

<b>Input:</b>	Ethernet input
<b>Output:</b>	Ethernet output x 5

### WARNING

LISTENING TO AUDIO AT EXCESSIVE VOLUMES CAN CAUSE PERMANENT HEARING DAMAGE. USE AS LOW A VOLUME AS POSSIBLE.

Overexposure to excessive sound levels can damage your ears, resulting in permanent noise-induced hearing loss. Do not use earphones for a long time and set the volume below 50%.

### LIMITED WARRANTY



For the applicable warranty terms and conditions and additional information regarding the Xvive Limited Warranty, please email [support@xvive.com](mailto:support@xvive.com).

### LEGAL DISCLAIMER

Xvive accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice.

### PRODUCT APPLICATION

Use with one PX-B Snake and up to five Xvive PX-A Mixers and EC25 Ethernet cables

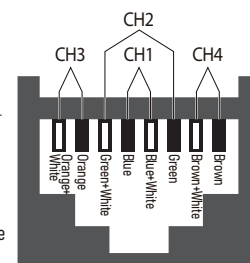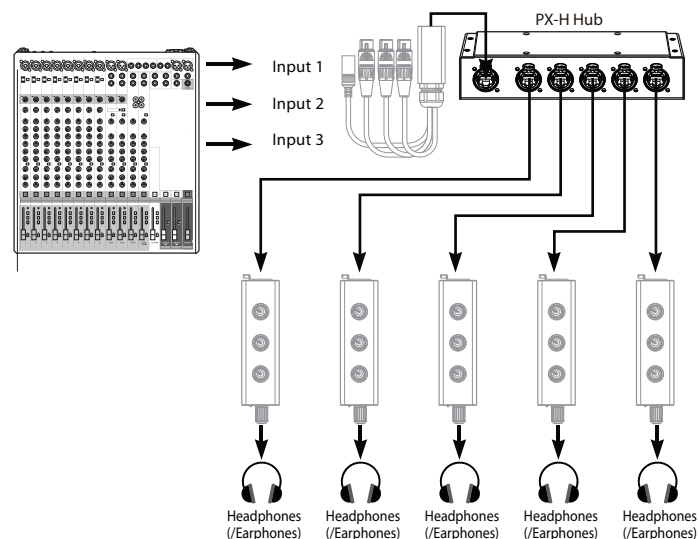

### ETHERNET INPUT AND OUTPUT

CH 1 is input 1 XLR hot and XLR cold, Blue, Blue+White  
 CH 2 is input 3 XLR hot and XLR cold, Green, Green+White  
 CH 3 is input 2 XLR hot and XLR cold, Orange, Orange+White  
 CH 4 is PoE power input, Brown (+), Brown+White (-)

### XVIVE CUSTOMER SERVICE

Email: [support@xvive.com](mailto:support@xvive.com)  
 Or, you can find your local distributor at [www.xvive.com](http://www.xvive.com)

### SHENZHEN FZONE TECHNOLOGY CO., LTD.

2nd floor, Building 12, Xicheng Industrial Area, Xixiang Town, Baoan District,  
 Shenzhen Guangdong China. 518101

