


BOWER PENDANT C360 YELLOW WITH SPHERE G150 EU

tala®

SKU: BWR-C360-YEL-SPHR-IV-01-EU/ BWR-C360-YEL-SPHR-IV-01-US

FINISH: YELLOW

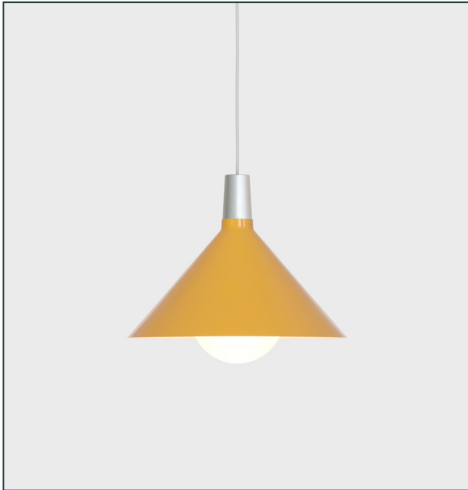

The light source can all be easily replaced.
For replacement parts, please visit our
website or contact us at customerservice@tala.co.uk.

FIXTURE - PHYSICAL

Pendant dimension:	L350mm x W350mm x H190mm <i>L13 6/8in x W13 6/8in x H7 4/8in</i>
Ceiling rose dimension:	L110mm x W110mm x H28mm <i>L4in x W4in x H1in</i>
Cable length:	3m <i>10in</i>
Materials:	Steel and Aluminium
Finish:	Yellow
Weight:	1270g <i>2.8lbs</i>
IP rating:	IP20 - Suitable for dry locations
Base:	E27 <i>E26</i>

BULB - PHYSICAL

Bulb dimension:	L150mm x W190mm <i>L5 7/8in x W7 4/8 in</i>
Glass shape:	G150
Materials:	Glass and nickel
Glass finish	Matte White
Weight	196g <i>0.43lbs</i>
Max. working temp.:	-5 to 40 °C
IP rating:	IP54
Power:	8W
Current:	0.04A
Voltage:	220-240V~
Frequency:	50/60Hz
Base:	E27 <i>E26</i>

ILLUMINATION

CCT:	2000-2800K
Lumens:	600lm
Incand equiv:	53W
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	90
TM30-Rg:	95
TM30-Rf:	101

ELECTRICAL

Wattage:	Max 60W
Voltage:	220-240V <i>110-120V</i>
Frequency:	50/60Hz



DIMMING

Dimmable 0-100%
Recommended dimmer Lutron Diva DVELV-300P

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

WARRANTY

2 years

Tala Europe B.V. Bertus Aafjeshove 40
Nieumwegein 3437 JN

EAN

5061046292496
5061046292526

tala.co.uk | hello@tala.co.uk | +44 7700 170343

Specification subject to change without
notice. Refer to our website for the most
recent product documentation. Tala
designs in the EU/UK are protected by
registered and or unregistered design rights