

# NORIOTA



Intertek  
ANSI/UL 471



Intertek  
ANSI/NSF 7



NR49G

NR49G REACH-IN REFRIGERATOR, 2 GLASS DOORS

## FEATURES AND BENEFITS

**201 Stainless Steel Interior (Floor, Walls, Ceiling):** Provides durable corrosion resistance, strong resistance to dents and deformation, and smooth surfaces that are easier to clean in daily commercial use.

**Ventilated Cooling System:** Circulates cold air throughout the cabinet to support more even temperature distribution.

**Low-E Glass Door:** Provides clear product visibility while helping reduce heat transfer and support more consistent cabinet temperature in daily commercial use.

**Heavy-Duty Adjustable Shelves:** White coated wire shelves support up to 50 kg (110 lb) each for flexible storage of heavy commercial product loads.

**Digital Temperature Control & Display:** Enables accurate temperature monitoring, easy adjustments, and includes high-temperature and door-open alarms for added protection and operational awareness.

**Full-Perimeter Magnetic Door Gaskets:** Creates a tight seal to lock in cold air and maintain optimal internal temperature.

**Efficient LED Interior Lighting:** Delivers bright, low-heat illumination for quick and easy product identification.


**R290 Refrigerant:** Uses environmentally friendlier hydrocarbon refrigerant with low environmental impact.

NORIOTA

[www.noriota.ca](http://www.noriota.ca) | [support@noriota.ca](mailto:support@noriota.ca) | 1-877-NORIOTA

# NORIOTA

## NR49G REACH-IN REFRIGERATOR, 2 GLASS DOORS

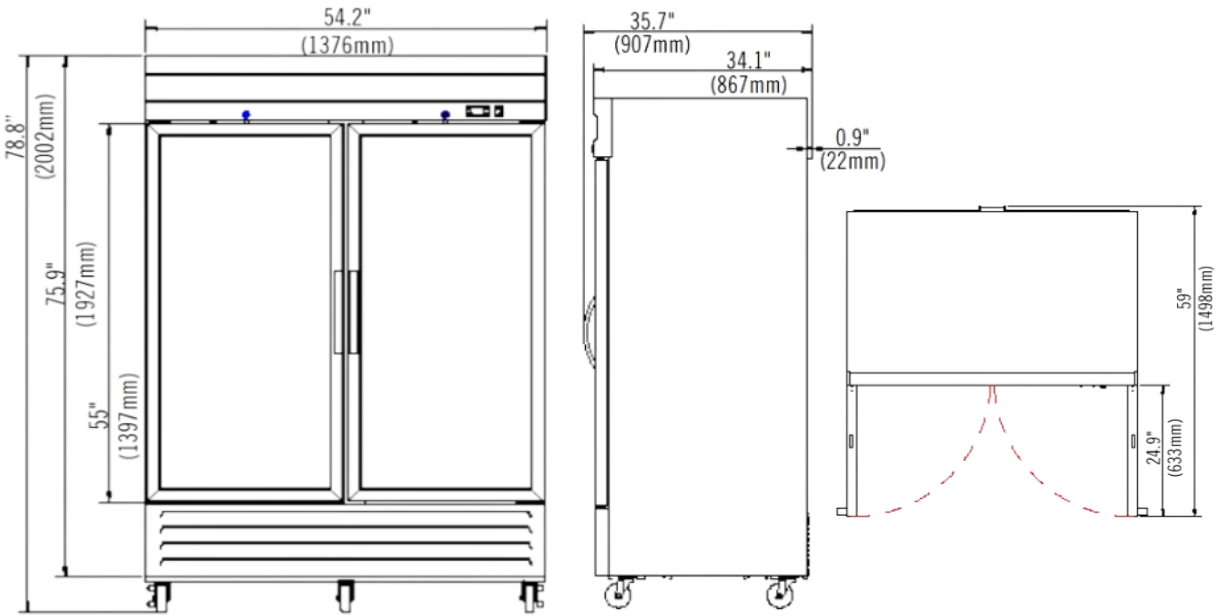

### Double Door NR49G

Model No.	NR49G
Net Storage Capacity	1191 L (42.06 CuFt)
Doors / Shelves	2 Doors, 6 Shelves
Holding Temperature	1 °C to 5 °C (33 °F to 41 °F)
Defrost	Automatic
Refrigerant	R290 (85 g)
Compressor Location	Bottom Mounted
Shelf Size	54 x 64.8 cm (21.3 x 25.5 in)
Shelf Weight Capacity	50 kg (110 lb)
Electrical	115V / 60Hz / 1Ph / 3.3 A
Power Input	335 W
Power Consumption	3.9 kWh/day
Plug Type	NEMA5-15P
Cord Length	250 cm (98.4 in)
Interior Lighting	LED Lighting
Door Style	Swing
Door Type	Glass
Lock and Keys	Yes
Installation Type	Freestanding
Product Dimensions	137.6 x 86.4 x 205.6 cm (54.2 x 34.0 x 81.0 in)
Product Internal Dimensions	125.2 x 73.5 x 130.5 cm (49.3 x 28.9 x 51.4 in)
Product Weight	178 kg (392.4 lb)
Shipping Dimensions	142 x 93.5 x 210 cm (55.9 x 36.8 x 82.7 in)
Shipping Weight	222 kg (489.4 lb)
Warranty	2 years parts & labour, 5 years compressor parts only