

UK/EU FIRTH WALL LIGHT

SKU: FTH-WL-WHT-GX53-2000-3000K-01-EU
FINISH: WHITE



FIXTURE - PHYSICAL

Total dimension:	L 78mm x W 150mm x H 150mm
Cable length:	-
Materials:	Glass, Stainless Steel, Aluminium and Silicone
Finish:	White
Weight:	1300g
IP rating:	IP65 - Wet Rated
Base:	GX53

FIXTURE - ELECTRICAL

Power:	7W
Voltage:	220-240V
Frequency:	50/60Hz

BULB


Bulb dimension:	W 75mm x H 31mm
Base type:	GX53
Materials:	Ceramic, polycarbonate, steel
Bulb cover finish:	Opal
Weight:	100g
Max. working temp.:	65 °C
IP rating:	IP20
Power:	7W
Current:	0.03A
Voltage:	220-240V~
Frequency:	50/60Hz
Base:	GX53

ILLUMINATION PER BULB

CCT:	2000-3000K
Lumens:	730lm
Incand equiv:	55W
Flicker:	<5%
Beam angle:	120°
Light source:	LED
CRI:	95Ra
R9:	80
TM30-Rg:	98
TM30-Rf:	91



IES/LDT photometry files
and product photography
available on request

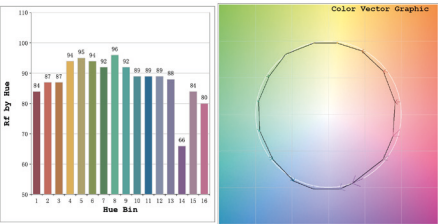

DIMMING

Dimmable 0-100%
Recommended dimmer: Tala Rotary Wall Dimmer
(For a full list of recommended and compatible dimmers see website)

LOGISTICAL

Unit Packaging
PC/Ctn: 1
Gross Weight: 1,350g/2.98lbs
L 195mm / 7 5/8in W 195mm / 7 5/8in H 175mm / 6 7/8in

Outer Carton
PC/Ctn: 4
Gross Weight: 5.75kg / 12.68lbs
L 405mm / 16in W 205mm / 8 1/8in H 370mm / 14 5/8in

WARRANTY

2 years

EAN

5061046298467

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala Europe B.V. Bertus Aafjeshove 40
Nieuwegein 3437 JN

tala.co.uk
hello@tala.co.uk
+44 7700 170343