WESTERN REFRIGERATION & BEVERAGE EQUIPMENT LTD.
1232 - 36 Ave. NE, Calgary, Alberta, Canada I P: 403.250.9656 I F: 403.291.9213 I info@wr.ca I www.wr.ca

SPEC SHEET

SNOOKER ICE MACHINES

# SK-729

## Modular Ice Cube Machine

**Brand**
Snooker
**Output**
700 lbs / 24 hrs · bin B-445




**SK-729**
shown on B-445 bin



**Half cube**
22 x 13 x 22 mm

Air-cooled modular ice machine head for bars, restaurants and kitchens. Produces up to 700 lbs of half cube ice a day and sits on a 30" wide bin. Digital controls, a fault alert system and a water filter come standard. Bin sold separately.

## Dimensions

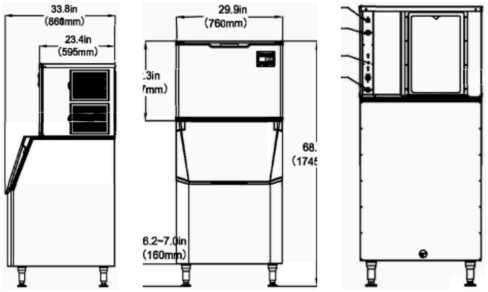


Side Front Rear

Shown on B-445 bin: 33.8" depth with bin.

## Standard features

- 700 lbs of ice per 24 hrs
- Half cube ice
- Fits 30" wide bins (recommended B-445)
- Digital control panel
- Ice thickness adjustment
- Automatic fault alert system
- Air-cooled R290 refrigeration
- Stainless steel exterior
- Water filter included

| Performance | |
|---|---|
| Ice production | **700 lbs / 24 hrs (rated)** |
| 50°F air / 50°F water | **538 lbs / 24 hrs** |
| 70°F air / 50°F water | **620 lbs / 24 hrs** |
| 90°F air / 70°F water | **532 lbs / 24 hrs** |
| Ice cube | **Half cube, 22 x 13 x 22 mm** |
| Condenser | **Air cooled** |
| Refrigerant | **R290** |
| Energy use | **26.9 kWh / 24 hrs** |

| Unit & installation | |
|---|---|
| Head only (W x D x H) | **29.92" x 24.33" x 22.36"** |
| Net weight | **143 lbs** |
| Shipping (W x D x H) | **33.27" x 29.53" x 24.41", 154 lbs** |
| Electrical | **220V / 60Hz / 1 ph** |
| Ambient air | **5 to 40°C (41 to 104°F)** |
| Water temperature | **5 to 35°C (41 to 95°F)** |
| Water pressure | **19 to 80 psi (0.13 to 0.55 MPa)** |
| Recommended bin | **B-445, sold separately** |
| Certification | **ETL, ETL Sanitation, ENERGY STAR** |

## Warranty

3 year parts, labour & compressor, with purchase of a water filter

## Installation

Install on a level bin with a potable water supply and a gravity drain. Allow 11.8" clearance at the front, 5.9" at the sides and 7.9" at the rear for airflow.

Maintenance and cleaning are not covered under warranty. Replace the water filter cartridge about every 6 months (varies with water quality). Requires a dedicated 220V circuit. Specifications are subject to change without notice. Rev. October 2026.

Available on **AutoQuotes**