


FURRION NET-ZERO™

100W SOLAR PANEL

FSFF10MW-BL

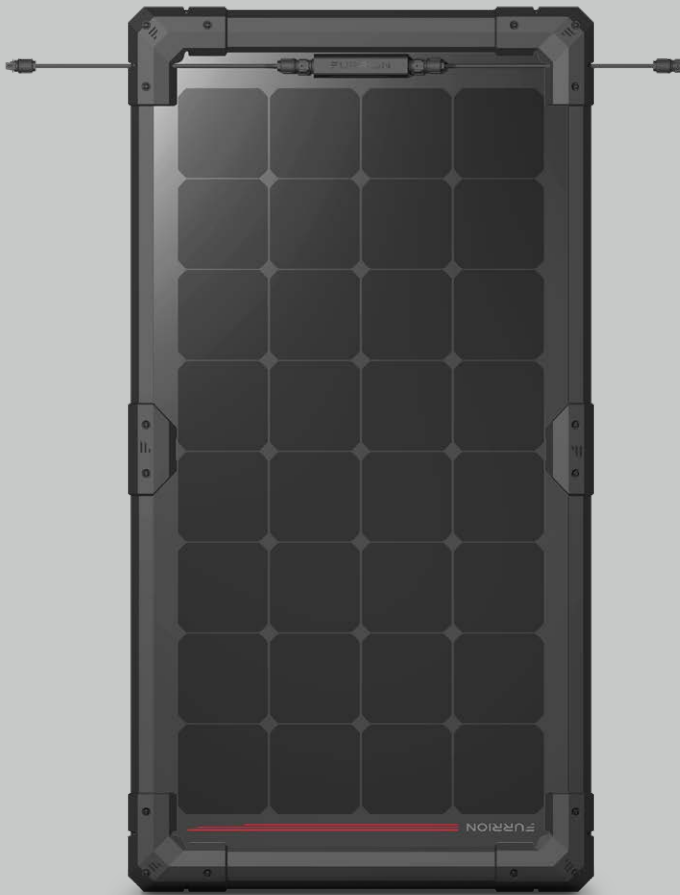

Solar Panel



Solar Panel with Mounting Bracket

100W

POWER



LIGHTWEIGHT



WATERPROOF



SHORT CIRCUIT &
SURGE PROTECTION



FLEXIBLE




SOLAR POWER
CELL TECH

- The panel's flexibility makes it ideal for storage in tight spaces as well as easier to transport and install
- Internal diode prevents reverse current drain
- Furrion utilizes solar power cell technology, resulting in higher-than-average efficiency at 19.9%




FSFF10MW-BL | 100W SOLAR PANEL

Solar Panel with Mounting Bracket

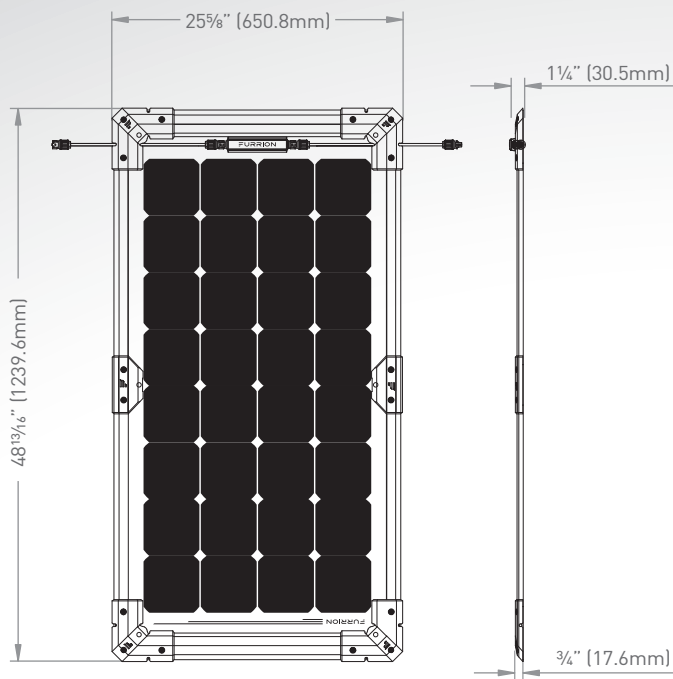

Solar Panel

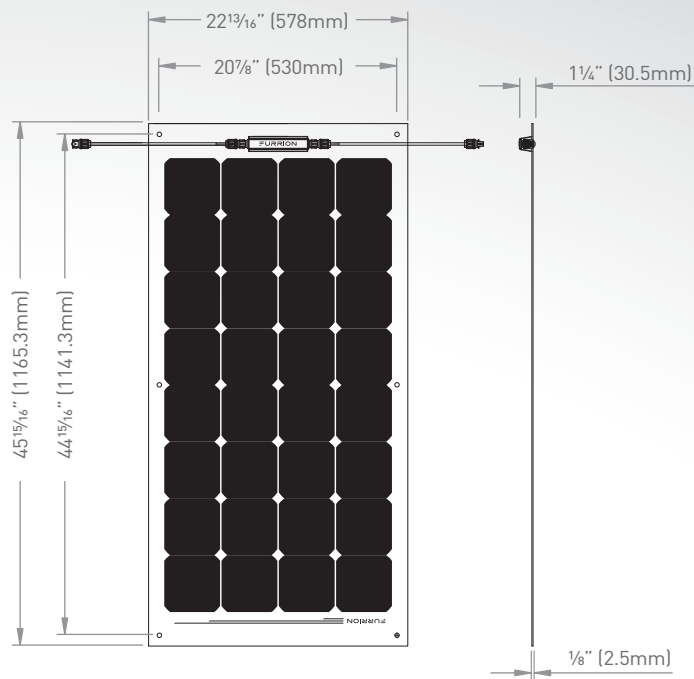

| | |
|-------------|--|
| FSFF10MW-BL | Flexible solar panels & bracket, without charger |
| FSFF10MWM | 100W portable solar panel mounting bracket |

Specifications

| | |
|------------------------------------|------------------------------|
| Max Power | 100W |
| Max Power Voltage (Vmp) | 17.8V |
| Max Power Current (Imp) | 5.6A |
| Open Circuit Voltage (Voc) | 21.6V |
| Short Circuit Current | 6A |
| Cell Efficiency | 19.9% |
| Maximum System Voltage | 600V |
| Series Fuse Rating | 10A |
| Temperature Co-efficient (Power) | -0.38%/°C |
| Temperature Co-efficient (Voltage) | -60.8mV/°C |
| Temperature Co-efficient (Current) | 2.2mA/°C |
| Cells | Sunpower C60 |
| # of Cells in Series | 32 |
| Cable | 4mm ² PV1-F 90cm |
| Connector | MC4 |
| Operation Temperature | -40°C to 80°C/-40°F to 176°F |

Packaging Information

| | |
|---|---------------|
| Packaging Type | Color Giftbox |
| Quantity Per Box (pcs) | |
| Individual Packaging Dimensions (W x H x D) | |
| Individual Packaging Gross Weight (kg/lbs) | |
| Individual Packaging Net Weight (kg/lbs) | |

Master Carton

| | |
|--------------------------------------|-------------------|
| Packaging Type | Master Carton Box |
| Quantity Per Box (pcs) | |
| Master Carton Dimensions (W x H x D) | |
| Master Carton Gross Weight (kg/lbs) | |
| Master Carton Net Weight (kg/lbs) | |