



La Ilustre Cerámica exhibition, Alcora (Spain) | Design: Maqla Arquitectura | Photography: Héctor Rubio · Images Positive



EXTENDED FAMILY

SIX RECESSED_154
SIX 48V_168

SIX



					P	CCT	Beam	I	Flux	LOR
SIX L 1	A286-11-10-	WT NT			11,5W	2700K	17°	350mA	1600Lm	93%
	A286-11-11-	WT NT			11,5W	3000K	17°	350mA	1650Lm	93%
	A286-11-12-	WT NT			11,5W	4000K	17°	350mA	1700Lm	93%
	A286-11-30-	WT NT			11,5W	2700K	26°	350mA	1600Lm	93%
	A286-11-31-	WT NT			11,5W	3000K	26°	350mA	1650Lm	93%
	A286-11-32-	WT NT			11,5W	4000K	26°	350mA	1700Lm	93%
	A286-11-20-	WT NT			11,5W	2700K	34°	350mA	1600Lm	90%
	A286-11-21-	WT NT			11,5W	3000K	34°	350mA	1650Lm	90%
	A286-11-22-	WT NT			11,5W	4000K	34°	350mA	1700Lm	90%
SIX L 2	A286-2- -10-	WT NT			24,5W	2700K	17°	700mA	2850Lm	93%
	A286-2- -11-	WT NT			24,5W	3000K	17°	700mA	2950Lm	93%
	A286-2- -12-	WT NT			24,5W	4000K	17°	700mA	3000Lm	93%
	A286-2- -30-	WT NT			24,5W	2700K	26°	700mA	2850Lm	93%
	A286-2- -31-	WT NT			24,5W	3000K	26°	700mA	2950Lm	93%
	A286-2- -32-	WT NT			24,5W	4000K	26°	700mA	3000Lm	93%
	A286-2- -20-	WT NT			24,5W	2700K	34°	700mA	2850Lm	90%
	A286-2- -21-	WT NT			24,5W	3000K	34°	700mA	2950Lm	90%
	A286-2- -22-	WT NT			24,5W	4000K	34°	700mA	3000Lm	90%

LED | 220 V~ | IP20 | CRI>90 | L80B10 > 60.000 h | MacAdam Step 2 | OPTIONS* | INCL | TRACK 3L | 350° | 310° | 17° / 26° / 34°


Ⓢ	*OPTIONS
1	No DIM
4	DIM DALI

ACCESSORY

SIX L High Chromatic LED**

NOT SOLD SEPARATELY

LED i » 366

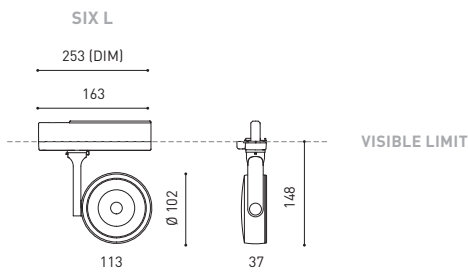

COLOUR | WT RAL 9016 | NT RAL 9005 | MATERIAL | AL | PC | TRACK 3L i » 226

** ACCESSORY & COLOURS AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



Poppys Life Store, Valencia (Spain) | Design: Destudio | Photography: Héctor Rubio - Images Positive



					P	CCT	Beam	I	Flux	LOR
SIX M 1	A331-11-10-	WT NT			11,5W	2700K	19°	350mA	1600Lm	93%
	A331-11-11-	WT NT			11,5W	3000K	19°	350mA	1650Lm	93%
	A331-11-12-	WT NT			11,5W	4000K	19°	350mA	1700Lm	93%
	A331-11-20-	WT NT			11,5W	2700K	28°	350mA	1600Lm	91%
	A331-11-21-	WT NT			11,5W	3000K	28°	350mA	1650Lm	91%
	A331-11-22-	WT NT			11,5W	4000K	28°	350mA	1700Lm	91%
	A331-11-30-	WT NT			11,5W	2700K	38°	350mA	1600Lm	93%
	A331-11-31-	WT NT			11,5W	3000K	38°	350mA	1650Lm	93%
	A331-11-32-	WT NT			11,5W	4000K	38°	350mA	1700Lm	93%
SIX M 2	A331-2- ④ -10-	WT NT			17W	2700K	19°	500mA	2050Lm	93%
	A331-2- ④ -11-	WT NT			17W	3000K	19°	500mA	2130Lm	93%
	A331-2- ④ -12-	WT NT			17W	4000K	19°	500mA	2160Lm	93%
	A331-2- ④ -20-	WT NT			17W	2700K	28°	500mA	2050Lm	91%
	A331-2- ④ -21-	WT NT			17W	3000K	28°	500mA	2130Lm	91%
	A331-2- ④ -22-	WT NT			17W	4000K	28°	500mA	2160Lm	91%
	A331-2- ④ -30-	WT NT			17W	2700K	38°	500mA	2050Lm	93%
	A331-2- ④ -31-	WT NT			17W	3000K	38°	500mA	2130Lm	93%
	A331-2- ④ -32-	WT NT			17W	4000K	38°	500mA	2160Lm	93%

LED | 220-240 V~ | CE | IP20 | CRI>90 | L80B10 >60.000h




④ *OPTIONS

1	No DIM
4	DIM DALI

ACCESSORY

SIX M High Chromatic LED**

NOT SOLD SEPARATELY

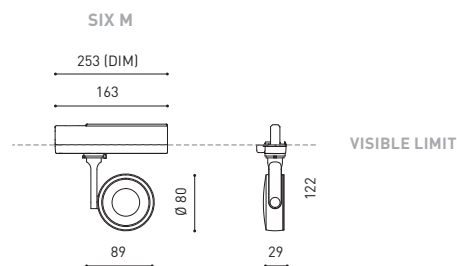

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL | AL | PC |

TRACK 3L ⓘ » 226

** ACCESSORY & COLOURS AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT