


US CORE RECESSED TRIM SPOTLIGHT WHITE WITH LIGHT ENGINE T50 2000-3000K LED

SKU: CORE-DL-WT-T50-2000-3000K-01-US

FINISH: WHITE

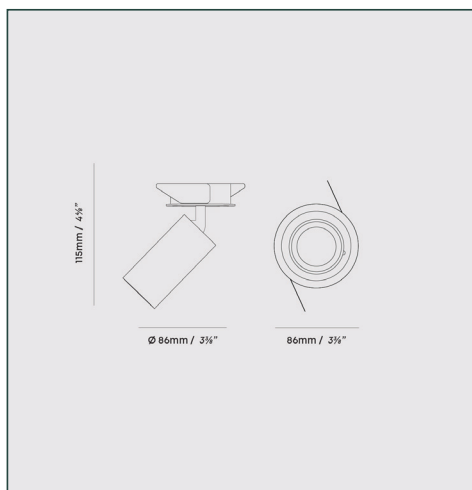

FIXTURE - PHYSICAL

| | |
|--------------------|-----------------------------------|
| Fixture dimension: | L 3 3/8in x W 3 3/8in x H 4 4/8in |
| Recessed Depth: | L 3 3/8in x W 3 3/8in x H 1in |
| Materials: | Aluminium |
| Finish: | White |
| Weight: | 0.56 lbs |
| IP rating: | IP20 - Suitable for dry location |

FIXTURE - ELECTRICAL

| | |
|------------|-----------|
| Power: | 7W |
| Voltage: | 110-120V~ |
| Frequency: | 50/60Hz |

BULB


| | |
|---------------------|---------------------|
| Bulb dimension: | L 2in x H 2in |
| Glass shape: | T16 |
| Materials: | Glass and aluminium |
| Glass finish: | Clear |
| Weight: | 0.28lbs |
| Max. working temp.: | 40 °C |
| IP rating: | IP20 |
| Power: | 7W |
| Current: | 0.06A |
| Voltage: | 110-120V~ |
| Frequency: | 50/60Hz |

ILLUMINATION PER BULB

| | |
|---------------|------------|
| CCT: | 2000-3000K |
| Lumens: | 530lm |
| Incand equiv: | 44W |
| Flicker: | <5% |
| Beam angle: | 36° |
| Light source: | LED |
| CRI: | 95Ra |
| R9: | 85 |
| TM30-Rg: | 100 |
| TM30-Rf: | 90 |



IES/LDT photometry files and product photography available on request

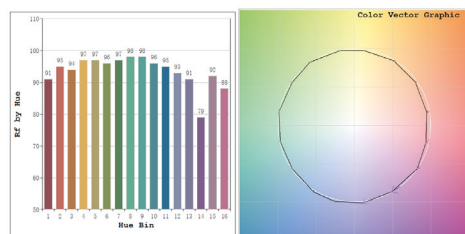

WARRANTY 2 years

EAN 5061046294063

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala North America Inc.
C/O LH Frishkoff & Company
546 5th Avenue, FL 9
New York NY 10036
United States

talalighting.com | hello@tala.co.uk | +1 (240) 724-8111