


# US CORE RECESSED TRIM DOWNLIGHT WHITE WITH LIGHT ENGINE T50 2000-3000K LED

SKU: CORE-DL-WT-T50-2000-3000K-01-US

FINISH: WHITE

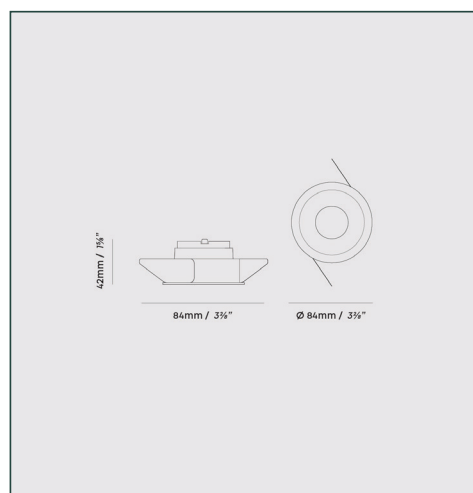

## FIXTURE - PHYSICAL


Fixture dimension:	L 3 2/8in x W 3 2/8in x H 1 5/8in
Materials:	Aluminium
Finish:	White
Weight:	0.31 lbs
IP rating:	IP20 - Suitable for dry location

## FIXTURE - ELECTRICAL


Power:	7W
Voltage:	110-120V~
Frequency:	50/60Hz

## BULB

Bulb dimension:	L 2in x H 2in
Glass shape:	T16
Materials:	Glass and aluminium
Glass finish:	Clear
Weight:	0.28lbs
Max. working temp.:	40 °C
IP rating:	IP20
Power:	7W
Current:	0.06A
Voltage:	110-120V~
Frequency:	50/60Hz

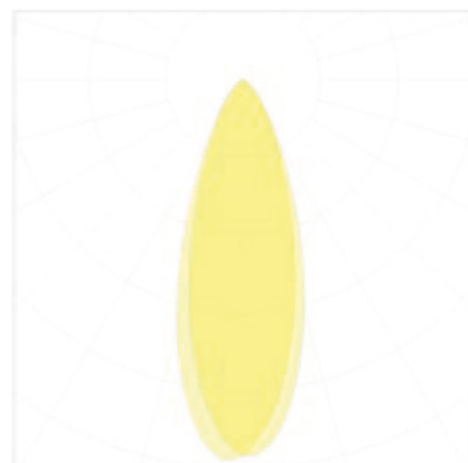

IES/LDT photometry files and product photography available on request

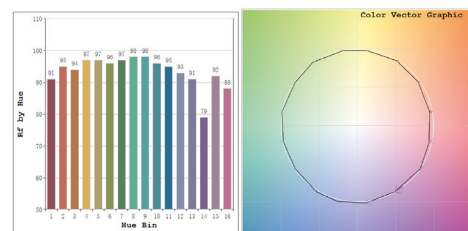

## ILLUMINATION PER BULB

CCT:	2000-3000K
Lumens:	530lm
Incand equiv:	44W
Flicker:	<5%
Beam angle:	36°
Light source:	LED
CRI:	95Ra
R9:	85
TM30-Rg:	100
TM30-Rf:	90



**WARRANTY** 2 years

**EAN** 5061046294094

Tala Energy Ltd. 25b Vyner Street,  
London, E2 9DG, United Kingdom

Tala North America Inc.  
C/O LH Frishkoff & Company  
546 5th Avenue, FL 9  
New York NY 10036  
United States

talalighting.com | hello@tala.co.uk | +1 (240) 724-8111