


US ROOT CHANDELIER ONE-TIER MEDIUM

tala®

SKU: ROOT-CDL-SET-02-US

FINISH: BRASS

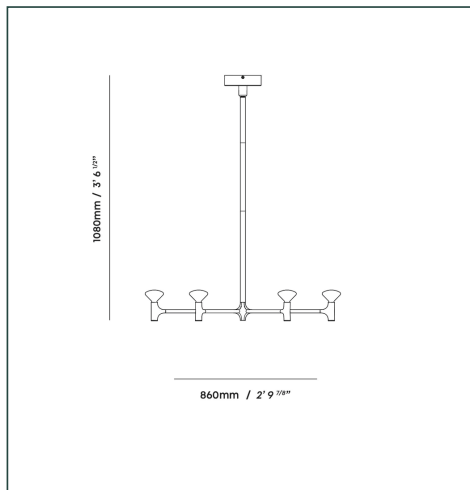

FIXTURE - PHYSICAL

Total dimension:	L 2' 9 7/8in x W 2' 9 7/8in x H 3' 6 1/2in
Ceiling rose dimension:	L 6 2/8in x W 6 2/8in x H 1 6/8in
Rod set (supplied):	L 8in x W 12in x H 16in
Number of bulbs:	6
Materials:	Brushed and Forged Brass
Finish:	Solid Brass
Weight:	14.2 lbs
IP rating:	IP20 - Suitable for dry locations
Base:	G4

FIXTURE - ELECTRICAL

Power output:	15W
Voltage:	110-120V~
Frequency:	50/60Hz
Current output:	1.26A
Power factor:	0.9
Driver:	Concealed in ceiling rose, 12V DC output

BULB

Bulb dimension:	L 3/4in x H 1 3/4in
Materials:	Glass and ceramic
Glass finish:	Matte White
Glass shape:	R80
Weight:	0.04 lbs
Max. working temp.:	40 °C
IP rating:	IP20
Power:	2.5W
Current:	0.2 A
Voltage:	12V
Base:	G4

ILLUMINATION PER BULB

CCT:	2000-3000K
Lumens:	220lm (Total fixture: 1320lm)
Incand equiv:	22W (Total fixture: 132W)
Flicker:	<5%
Beam angle:	360°
Light source:	LED
CRI:	95Ra
R9:	80
TM30-Rg:	100
TM30-Rf:	90

EAN

5056859701792

talalighting.com
hello@tala.co.uk
+1 (240) 724-8111

Tala Energy Ltd. 25b Vyner Street,
London, E2 9DG, United Kingdom

Tala North America Inc.
C/O LH Frishkoff & Company
546 5th Avenue, FL 9
New York NY 10036
United States