




PC603-4XLC - Pro-Connect Press - XLC Brass Adapters

PC603XLC Series

Forged DZR Brass Adapter



Certifications

Certified to NSF/ANSI 61 & 372, PS117

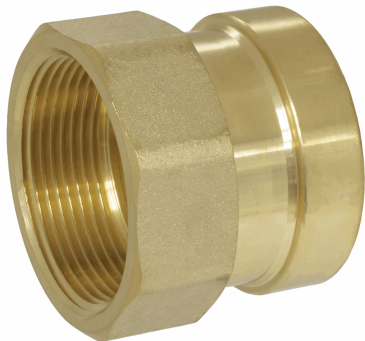

NO.	DESCRIPTION	MATERIAL
1	Body	Lead-Free DZR Brass
2	O-ring	EPDM
3	Grip Ring	Steel

Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C	D		
Press x FIP									300 PSI CWP Max	250°F Max
2 1/2"	902640XLC	1.63	1	8	2.50	2.64	0.93	1.57		
3"	902700XLC	1.98	1	8	3.00	3.13	1.02	1.77		
4"	902705XLC	3.05	1	8	4.00	4.14	1.08	2.13		

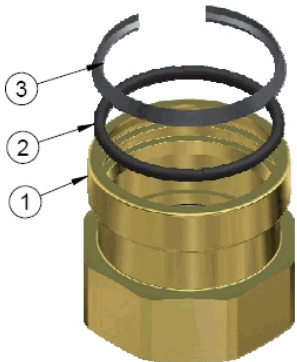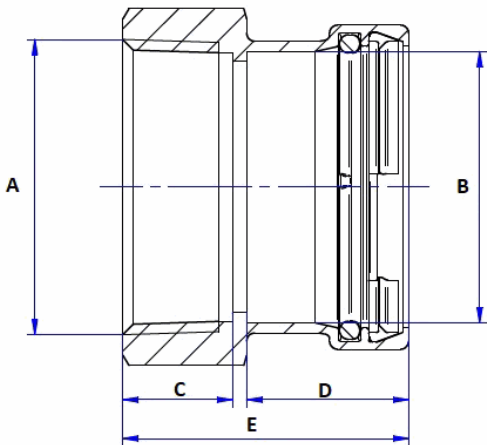

Specifications: Designed for use with water in residential or commercial plumbing and heating systems. Press ends will leak if left unpressed. Press XLC grip ring is a zinc coated manganese steel providing corrosion protection and extra durability. Threaded (NPT) ends comply with ANSI B1.20.1.





PC603-4XLC - Pro-Connect Press - XLC Brass Adapters

PC604XLC Series

Forged DZR Brass Adapter



Certifications

Certified to NSF/ANSI 61 & 372, PS117



NO.	DESCRIPTION	MATERIAL
1	Body	Lead-Free DZR Brass
2	O-ring	EPDM
3	Grip Ring	Steel

Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C	D	E	300 PSI CWP Max	250°F Max
Press x MIP											
2 1/2"	903265XLC	1.44	1	8	2.50	2.64	0.98	1.57	2.87		
3"	903270XLC	1.87	1	8	3.00	3.13	1.02	1.77	2.99		
4"	903275XLC	3.34	1	8	4.00	4.14	1.08	2.13	3.54		

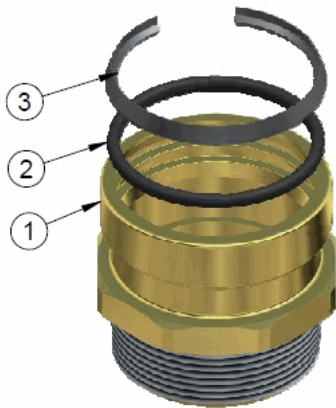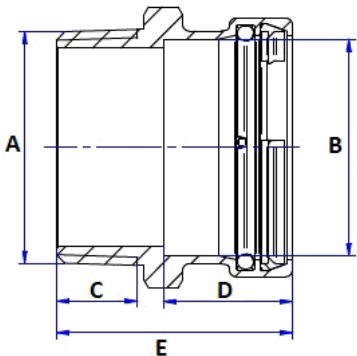

Specifications: Designed for use with water in residential or commercial plumbing and heating systems. Press ends will leak if left unpressed. Press XLC grip ring is a zinc coated manganese steel providing corrosion protection and extra durability. Threaded (NPT) ends comply with ANSI B1.20.1.