

**Refrigeration Equipment
Sandwich/Salad Preparation Table,
27" 8GN 1/6 containers - Stainless
Steel (R290)**

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738255 (KCHST27.8)

1-door sandwich/salad preparation table for 6 GN 1/6+2 GN 1/9 containers, 27", R290 refrigerant gas, +33/+41°F, stainless steel

Short Form Specification

Item No. _____

1-door sandwich/salad refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, side and top panels in 430 stainless steel; interior back, top panels and interior bottom panel in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board of 28,9x11,4x0,5 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

Main Features


- External temperature display.
- Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

Construction


- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds (6) 1/6 & (2) 1/9 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

APPROVAL: _____

Front

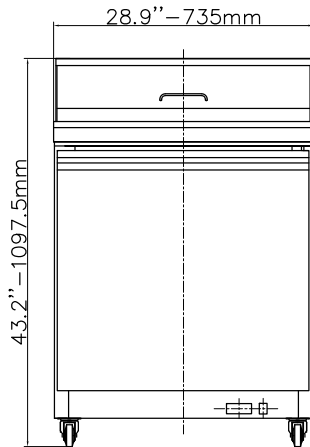


Side

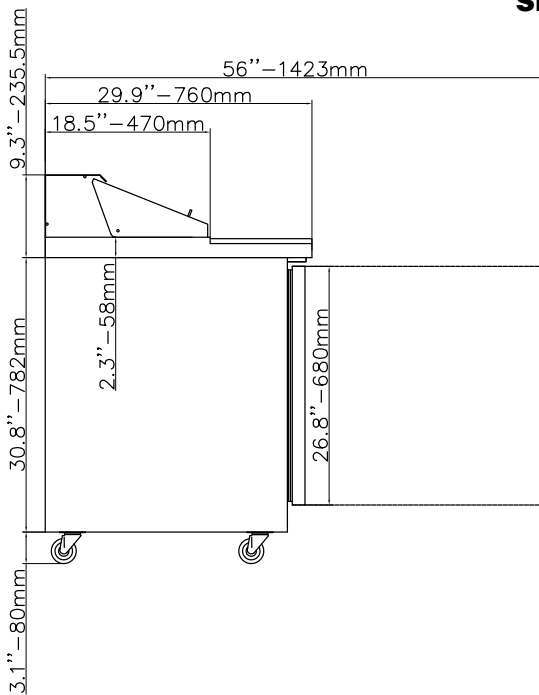

EI = Electrical connection

Top

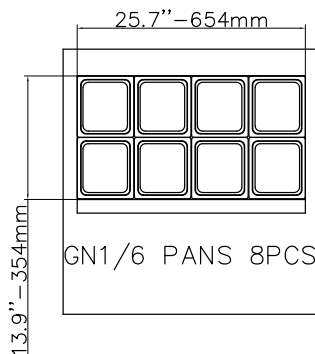

Electric

Supply voltage:	738255 (KCHST27.8)	115 V/1 ph/60 Hz
Electrical power, max:		0.5 kW
Current consumption:		5 Amps
Plug type:		USA NEMA 5-15P

Capacity:

Gross capacity:	7 cu.feet
------------------------	-----------

Key Information:

Door hinges:	Right Side
External dimensions, Width:	28 15/16" (735 mm)
External dimensions, Depth:	29 15/16" (760 mm)
External dimensions, Height:	43 3/16" (1097.5 mm)
Number and type of doors:	1 Full
Internal Dimensions (depth):	23 13/16"
Internal Dimensions (height):	23 1/2"
Internal Dimensions (width):	24 1/16"
Shipping height:	47 1/4" (1200 mm)
Shipping weight:	236 lbs (107 kg)
Shipping volume:	26.27 ft ³ (0.74 m ³)
Type of grids (included):	Vinyl-Coated steel
Number and type of grids (included):	1 - 636x443
Type of external material:	Stainless Steel
Type of internal material:	Polystyrene
Warranty:	3 / 5 years

Refrigeration Data

Compressor power:	
Refrigerant type:	R290
Refrigerant weight:	85 g
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost