






# IBC COVER



TOUGH-AS PRODUCTS FOR TOUGH-AS WORK

<b>CODE:</b> IBC-COVER-Colour	<b>COLOURS:</b> White, Blue, Red, Yellow, Green, Beige
<b>SIZE:</b>	1000mm x 1210mm x 1020mm (refer drawing)
<b>MATERIAL:</b>	HVG EnduroFLEX FR (see datasheet)

ALL PANELS HF WELDED

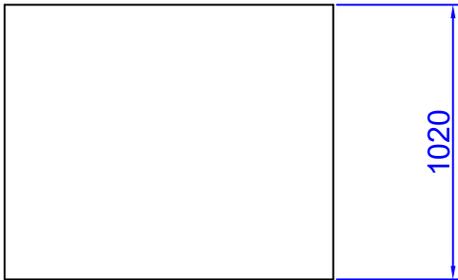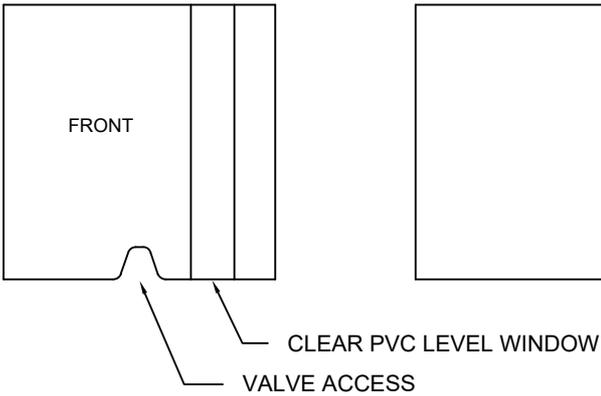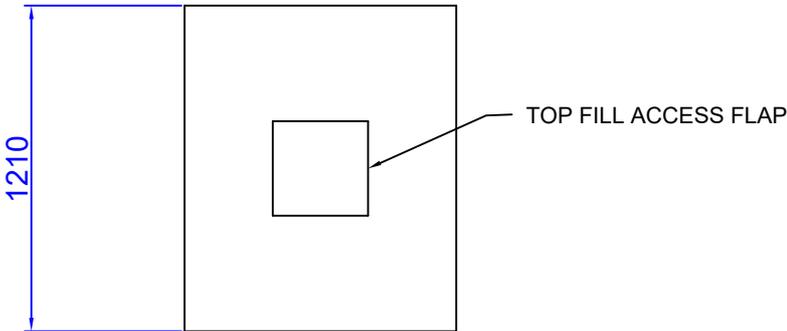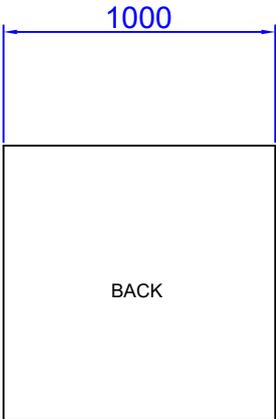

IBC COVER rev1  
Material: HVG EnduroFLEX FR

# IBC COVER – Material Datasheet

<b>EnduroFLEX™ FR Datasheet</b>	
<b>Description:</b>	<i>Premium quality 670gsm tear stop, reinforced spread coated PVC with gloss acrylic lacquer. Developed using the highest quality resins, UV stabilisers and fire retardant inhibitors.</i>
<b>Application:</b>	<i>General Purpose Outdoor: tarps, bunker covers, tool bags, ute and trailer covers etc...</i>
<b>Weight:</b>	<i>670 gsm</i>
<b>Composition:</b>	<i>Tear stop reinforced polyester scrim</i>
<b>Colours:</b>	<i>Red, yellow, white, beige, grey, green, blue, black</i>
<b>Coating:</b>	<i>Spread coated PVC</i>
<b>Fabric Finish:</b>	<i>Gloss acrylic lacquered on both sides</i>
<b>Tensile strength:</b>	<i>Warp 3012N/5cm, Weft 2648N/5cm</i>
<b>Tear strength:</b>	<i>Warp 704N/5cm , Weft 496N/5cm</i>
<b>Temperature Range:</b>	<i>-20C to +70C</i>
<b>UV Resistant:</b>	<i>UV stabilized scrim and coating</i>
<b>Supplier Warranty:</b>	<i>3 year UV Warranty</i>
<b>Fire Rated:</b>	<i>AS1530 Part 2</i>  <i>*Laboratory tests show when the ignition source is removed the fabric immediately self extinguishes</i>