


IQ 1300

208-230 V / 60 Hz

MODULAR GRANULAR ICE MACHINE

3 YEARS
WARRANTY
PARTS & LABOR

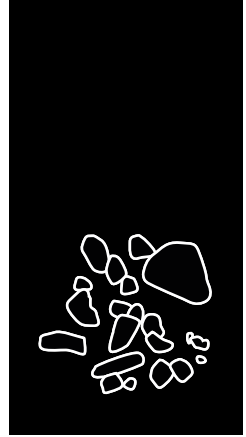











FEATURES

- ▶ PRODUCES WET GRANULAR ICE
- ▶ THE MOST EFFICIENT EVAPORATOR OF THE MARKET, LOWER ENERGY CONSUMPTION AND HIGHER ICE PRODUCTION
- ▶ EVAPORATOR WITHOUT GASKETS OR SEALS
- ▶ STAINLESS STEEL AUGER WITH RESILIENT COATING TO MAXIMIZE LIFESPAN
- ▶ POWERFUL SPEED REDUCER ON TOP
- ▶ AISI 304 STAINLESS STEEL BODY
- ▶ ELECTROMECHANICAL CONTROL SYSTEM
- ▶ ICE DROPS OUT THROUGH THE OPENING ON THE BOTTOM OF THE UNIT
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS)



I THE INSTALLATION OF AN ANTI-SCALE FILTER AND PERIODIC CLEANING ARE ADVISED IN AREAS WITH MEDIUM OR HIGH LIMESCALE CONTENT (HARD WATER)

-  **EASI**
Easy Access for Service & Installation
-  **STIF**
Strong Inox Frame
-  **FRONT VENTILATION**

	 24 H	 70°F/21°C	 50°F/10°C	 90°F/32°C	 70°F/21°C	 in (mm)	 in (mm)	
		lbs (Kg)		lbs (Kg)				
IQ 1300 A		1,430 (649)	1,030 (467)	Width 26.58" (675)	Depth 21.66" (550)	Width 29.53" (750)	Depth 25.60" (650)	WET GRANULAR ICE 25% RESIDUAL WATER CONTENT
IQ 1300 W		1,450 (658)	1,050 (476)	Height 31.50" (800)	Height 35.44" (900)			

ACCESSORIES

NOT INCLUDED (OPTIONAL)



10" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS-101 K



10" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS10



SCALE KLEEN

RECOMMENDED BINS



S 500 + IQ 1300



S 750 + IQ 1300



S 900 + IQ 1300



S 1050 + 1/2 IQ 1300



SCS 350 + IQ 1300



SCS 700 + IQ 1300



SCD 800 + 1/2 IQ 1300



SCD 1400 + 1/2 IQ 1300




SCD 1800 + 1/2 IQ 1300


TECHNICAL SCHEME

IQ 1300


RIGHT SIDE VIEW




FRONTAL VIEW




LEFT SIDE VIEW



REAR VIEW

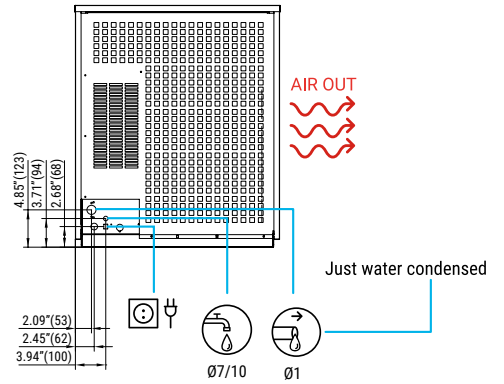

CENTRAL CROSS SECTION VIEW OF THE BASE

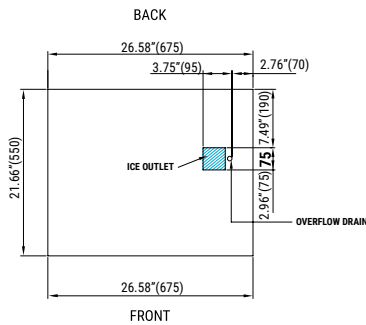

* All dimensions in inches (and mm)

OPERATING CONDITIONS


PRODUCTION (LBS) 60Hz

±10% V

50°F/109°F

41°F/100°F

14.5 psi (1 bar) / 87 psi (6 bar)



V	Hz	ph
208-230	60	1N



IQ1300 AIR COOLED

°F / °C	50° / 10°	60° / 15°	70° / 21°	86° / 30°
50° / 10°	1525	1440	1290	1145
68° / 21°	1430	1340	1190	1050
90° / 32°	1220	1125	1030	915
109° / 43°	1000	915	836	700



IQ1300 WATER COOLED

°F / °C	50° / 10°	60° / 15°	70° / 21°	86° / 30°
50° / 10°	1546	1460	1315	1167
68° / 21°	1450	1359	1213	1070
90° / 32°	1237	1141	1050	933
109° / 43°	1014	928	852	714

MODELS

IQ 1300 A

IQ 1300 W

	Temp. Ev. (°F)	ASHRAE CONDITIONS (BTu/h)	(W)	(W) 109°F	(AWG/mm²)	(n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal / 100lbs (l/h)	HEAT REJECTED (BTu/h) (W)	(lbs)	(lbs)		
IQ 1300 A	5°	20,207	5,922	1,700	14/1.5	3	20	4.9	7.1	27	15,099	4,425	231	287
IQ 1300 W	5°	20,207	5,922	1,700	14/1.5	3	20	4.2	29.05	110	15,099	4,425	231	287



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS
ON COMPRESSOR &
EVAPORATOR
Read our warranty policy
to know more about
limitations and exclusions

