


## ANGLE LEDGE ROLL-IN REFRIGERATOR RACKS 207 SERIES

### FEATURES AND BENEFITS:

- Durable rack specifically designed to fit roll-in or pass through refrigerators, freezers, and warming cabinets; eliminates unnecessary product handling while maintaining proper temperature levels. Holds 18" x 26" pans.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Extruded angle ledge pan supports, riveted in place, accommodate heavy loads. Bottom of pan rests on angle ledges. See reverse side for capacity and pan spacing.
- Inboard heavy duty 5" swivel casters, two with brakes. Wheel placement permits easy "in-and-out" of roll-ins.
- Two styles available; Custom (C) or Deluxe (D). Deluxe includes perimeter bumper and enclosed base.

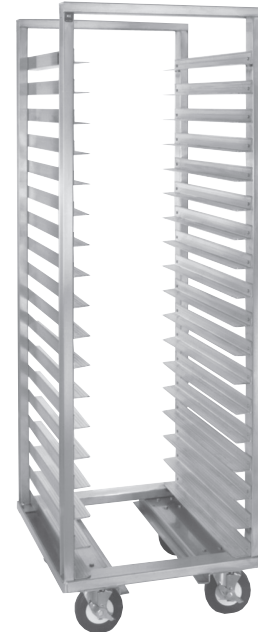

207-1818C




### ACCESSORIES and OPTIONS (Available at extra cost):

- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Various Caster Options

See page G-36 for accessory details.



## 207 Roll-In Series

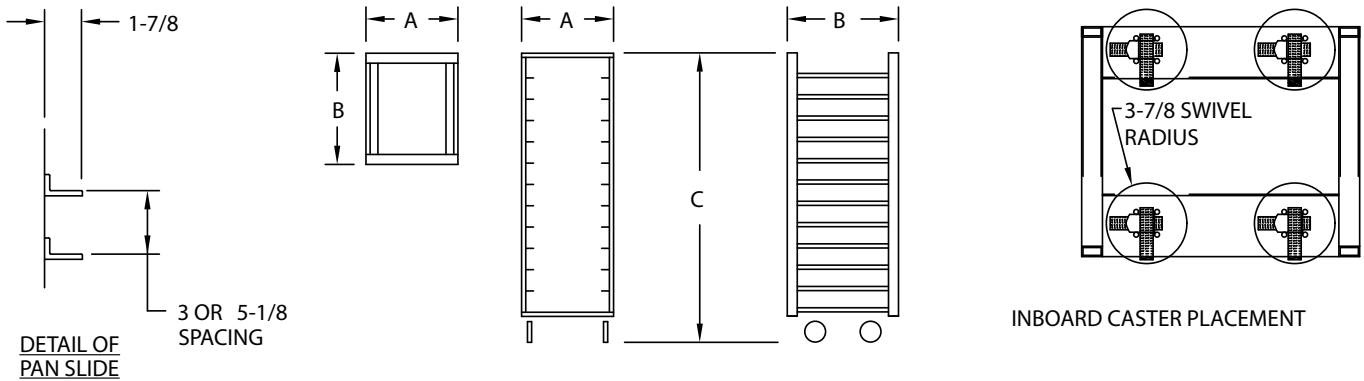

### CUSTOM ("C")

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
207-1818-C	18	18 x 26	IN	21	25-1/8	64-1/2	18-3/8	24-3/8	55-15/16	LBS	65
		460 x 660	MM	535	640	1640	470	620	1425	KG	29
207-1811-C	11	18 x 26	IN	21	25-1/8	64-1/2	18-3/8	24-3/8	55-15/16	LBS	60
		460 x 660	MM	535	640	1640	470	620	1425	KG	27

### DELUXE ("D")

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
207-1818-D	18	18 x 26	IN	22-7/8	27	64-1/2	18-3/8	24-3/8	55-15/16	LBS	70
		460 x 660	MM	585	690	1640	470	620	1425	KG	32
207-1811-D	11	18 x 26	IN	22-7/8	27	64-1/2	18-3/8	24-3/8	55-15/16	LBS	65
		460 x 660	MM	585	690	1640	470	620	1425	KG	29

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

#### RACK:

- Posts: Extruded aluminum channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded aluminum channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Bolsters: Formed .190 aluminum; welded to posts, casters attached.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

#### DELUXE ("D") MODELS:

- Base plate: One piece .063 aluminum.
- Bumper: 1" wide gray rubber, perimeter type.

#### PAN SLIDES:

- Extruded angles, 1-7/16 x 1-7/8 x .102; riveted to posts.
- Pan spacing:  
Model 207-1818: 3" centers.  
Model 207-1811: 5-1/8" centers.



Gold indicates our Best Rack with the best warranty in the industry. 3-Year Parts / 1-Year Labor with lifetime guarantee against rust & corrosion

#### SHORT FORM SPECIFICATIONS

Cres Cor Roll-In Refrigerator Rack Model 207-18\_\_\_\_ - (C) or (D). Extruded aluminum welded construction with angles riveted. Capacity (\_\_\_\_) 18" x 26" pans on (\_\_\_\_) centers. Formed .190 bolsters. Inboard 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F.

- Custom Model (C)
- Deluxe Model (D) has .063 aluminum base plate; perimeter bumper.

3-Year Parts / 1-Year Labor warranty. Lifetime guarantee against rust & corrosion. Provide the following accessories: \_\_\_\_\_ . NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833  
Phone: 877/CRESCOR • Fax: 440/350-7267  
www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.